

# USER GUIDE

**Manufacturer:**

Dymax


**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

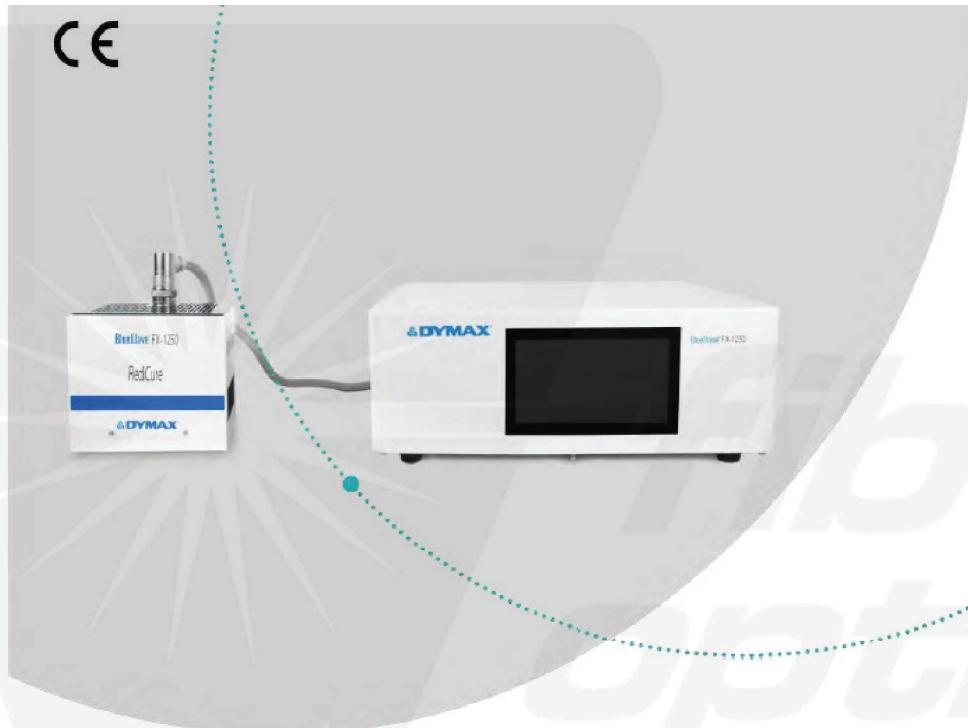

## BlueWave® FX-1250

Large-Area LED Flood System

User Guide

Rev: C

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax


**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

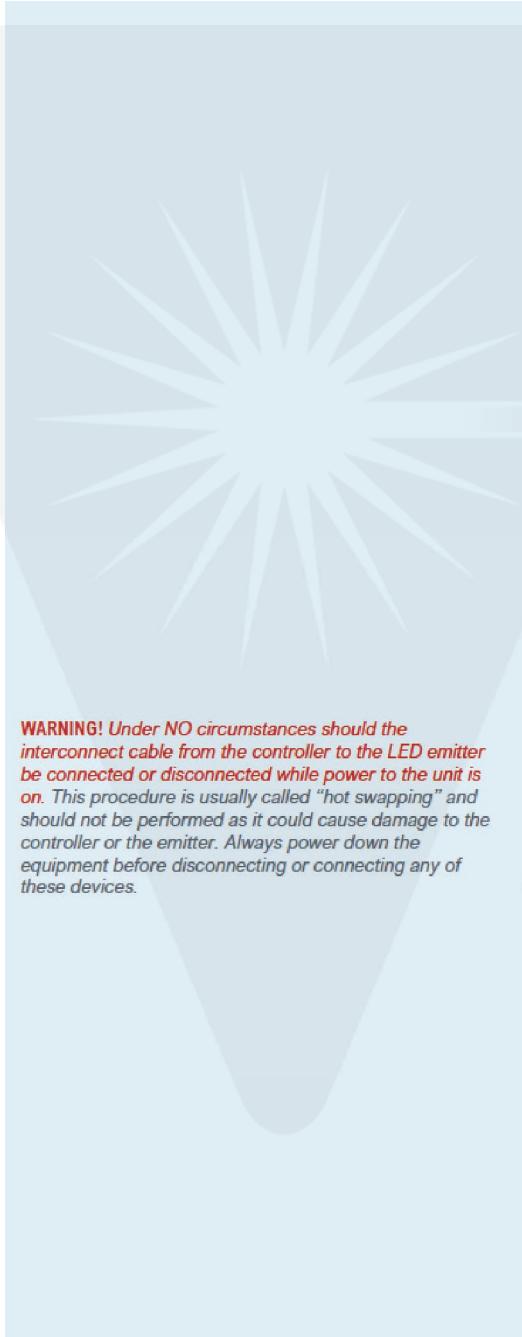

**WARNING!** Under NO circumstances should the interconnect cable from the controller to the LED emitter be connected or disconnected while power to the unit is on. This procedure is usually called "hot swapping" and should not be performed as it could cause damage to the controller or the emitter. Always power down the equipment before disconnecting or connecting any of these devices.

## Introduction

This guide describes how to set up, use, and maintain the BlueWave® FX-1250 LED flood-curing system safely and efficiently.

**Intended Audience**

This user guide is meant for experienced process engineers, technicians, and manufacturing personnel. If you are new to high-intensity LED light sources and do not understand the instructions, contact Dymax Application Engineering for answers to your questions before using the equipment.

**Where to Get Help**

Dymax Customer Support and Application Engineering teams are available by phone and email in the United States, Monday through Friday, from 8:00 a.m. to 5:30 p.m. Eastern Standard Time, and in Germany, Monday through Friday, from 8:00 a.m. to 5:00 p.m. Central European Time. You can also email Dymax at [info@dymax.com](mailto:info@dymax.com) or Dymax Europe GmbH at [info\\_de@dymax.com](mailto:info_de@dymax.com). Contact information for additional Dymax locations can be found on the back cover of this user guide.

Additional resources are available to ensure a trouble-free experience with our products:

- Detailed product information on our website [www.dymax.com](http://www.dymax.com) & [www.dymax.de](http://www.dymax.de)
- Dymax adhesive Product Data Sheets on our website
- Safety Data Sheets (SDS) provided with shipments of Dymax adhesives

## Safety



**WARNING!** If you use this UV light source without first reading and understanding the information in the *UV Light Safety Guide*, SAF001, injury can result from exposure to high-intensity light. To reduce the risk of injury, please read and ensure you understand the information in that guide before assembling and operating the Dymax UV LED light source.

To use the BlueWave FX-1250 system safely, it must be set up and operated in accordance with the instructions given by Dymax. Using the system in any other manner will impair the protection of the system. Dymax assumes no liability for any changes that may impair the protection of the BlueWave FX-1250 system.

This device falls under IEC 62471 Risk Group 3 for UVA and Blue Light emissions:



**WARNING!** UV emitted from this product. Avoid eye and skin exposure to unshielded products.



**WARNING!** Possibly hazardous optical radiation emitted from this product. Do not look at operating lamp. Eye injury may result.



**WARNING!** Possibly the thermal exhaust hole temperature from emitter will be high, please don't touch the heatsink by hand



**WARNING!** The BlueWave FX-1250 is designed and certified to operate with the Dymax supplied 16 Amp, 1.5 mm<sup>2</sup>, 3 conductor power cord. Do not use any other non-standard power cord.



**WARNING!** The BlueWave FX-1250 is designed and certified to operate as instructed within this document. Alteration of the system or its component installation may pose a shock hazard.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.



# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**


Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Table 1.  
Labels

Warning Labels	
Product Information Label	
High Temperature Caution Label	
Emitter Wavelength Label (RediCure, PrimeCure, or VisiCure)	

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

## Unpacking

**Unpacking and Inspecting Your Shipment**

Upon arrival, inspect all boxes for damage and notify the shipper of box damage immediately. Open each box and check for equipment damage. If parts are damaged, notify the shipper and submit a claim for the damaged parts. Contact Dymax so that new parts can be shipped to you immediately. The parts below are included with your purchase configuration. If parts are missing from your order, contact your local Dymax representative or Dymax Customer Support to resolve the problem.

Inspect the glass for any damage or residue on the surface. Carefully clean the glass with the alcohol swab. Take care not to touch the glass with bare hands, as any residue left on the window can adversely affect performance on the unit.

**Parts Included**

*The parts below are included with your purchase configuration  
Controller Only\**

- BlueWave FX-1250 1CH or 2CH Controller (model as selected at time of purchase)
- Power Cord
- BlueWave FX-1250 LED Flood System User Guide
- UV-Light Safety Guide (SAF001)
- Terminal Block (attached to the controller, but not plugged in, with jumper wires installed)
- Footswitch
- Safety Eyewear

**Emitter Only:**

- BlueWave FX-1250 Emitter (RedCure, PrimeCure, or VisiCure, model as selected at time of purchase)
- UV-Light Safety Guide (SAF001)

\* Orders of individual controllers and emitters must purchase interconnect cables separately.

**Complete Kit:**

- All parts listed above included  
(Note: only the 1CH Controller is available in a Complete Kit)
- Interconnect Cable (Type IS-L)

**Figure 4.**


Components of a BlueWave FX-1250 -Controller  
Only  
88804/88805/88846/88847/88850/88851

**Figure 5.**

Components of a BlueWave FX-1250 -Emitter Only  
88801/88802/88803

**Figure 6.**

Components of a BlueWave FX-1250 - Complete Kit  
88848/88856/88859/88849/88857/88860/88855/88856/88861

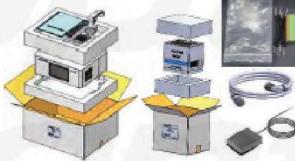**Figure 7.**

Interconnected Cable Installed



## System Installation

**System Assembly**

The system includes two major parts, the controller and emitter. The two parts are shipped separately. To assemble the two parts together, plug one side of the interconnect cable into the controller and the other side into the emitter (Figure 7).

*NOTE: Be careful to keep the glass at the bottom of the emitter clean.*

*To avoid leaving fingerprints on the glass, do not touch the glass with bare hands.*



**WARNING!** The BlueWave FX-1250 is designed and certified to operate as instructed within this document. Alteration of the system or its component installation may pose a shock hazard.

**System Cooling**

The system can be used in various scenarios with additional mounting fixtures or Dymax accessories, i.e., as a bench-top unit with a stand on a chamber, as part of a conveyor, etc. This system should only be operated in a location that provides proper cooling. Location requirements are as follows:

- For proper cooling of the unit, upper intake and lower exhaust must not be blocked.
- Minimum recommended clearance is 8 inches [200 mm].
- Note that the lower exhaust may have one side blocked for installations where two units are side by side. The system will operate safely but run hotter.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Data is subject to change without notice. FOC last update 2/5/2026.*

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**


Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

► [Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm](#)


**Figure 8.**  
Recommended Cooling Clearance

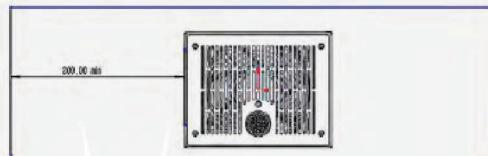**Wiring and Connections**

All the wire and cable connections are located on the rear of the controller or the top of emitter.

**Figure 9.**

Controller Connections

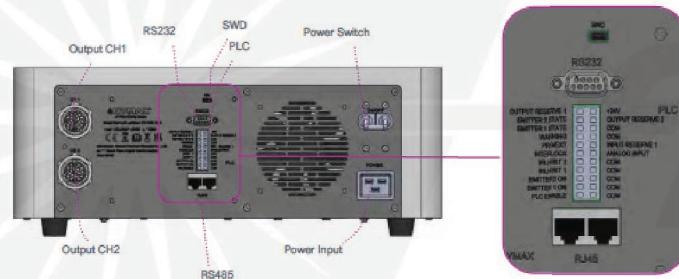

**Power Switch:** Turns the unit on and off.


**Power Input:** The power cord plugs in here. Only use the power cord supplied by Dymax (Figure 10) as the power cord supplied with the controller is specifically designed and certified to work with the controller.



**WARNING!** The BlueWave FX-1250 is designed and certified to operate with the Dymax supplied 16 Amp, 1.5 mm<sup>2</sup>, 3 conductor power cord. Do not use any other non-standard power cord.

**Figure 10.**

Power Cord

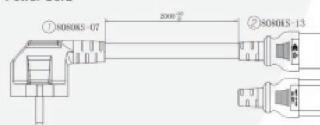

**Output CH1/CH2:** Output power and control signal to emitter. Only use the interconnect cable made by Dymax (Figure 11) as this interconnect cable is specifically designed for this system. One controller in 2CH configuration can support up to two emitters at the same time.

**SWD:** Burn in or update the software into controller.

**RS232:** Conduct communication to computer.

**PLC:** Controlled by PLC program.

**RS485:** Controlled by Internet.

**Connections**

The interconnect cable has two 15P plugs that connect the controller to the emitter.

**Plugging the Interconnect cable into the controller:** Roll the plug clockwise while inserting to plug the cable in. Roll the plug counterclockwise while removing to unplug the cable (Figure 12).

**Plugging the Interconnect cable into the emitter:** Roll the plug clockwise while inserting to plug the cable in. Roll the plug counterclockwise while removing to unplug the cable (Figure 13).

**Figure 12.**

Plug Interconnect Cable into Controller



*Attention: When plugging in the female and male connectors, observe the key and keyway of each connector. The key should align with the keyway (Figure 14).*

**Figure 11.**  
Interconnect Cable for Output Channels 1 & 2  
6402564026**Figure 13.**  
Plug Interconnect Cable into Emitter

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Data is subject to change without notice. FOC last update 2/5/2026.*

# USER GUIDE



## Manufacturer:

Dymax

## Product Name:

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

## Manufacturer Part Number:

88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm


Figure 14.

Key (Left) and Keyway (Right)



Figure 15.

Plug Footswitch into Controller

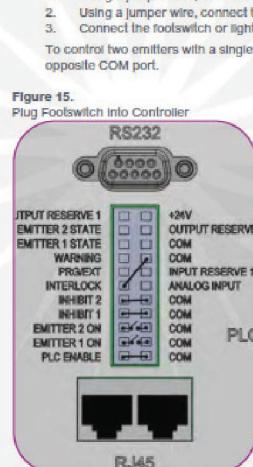

## I/O Interface Summary

Table 2 below shows the summary of all signals on the PLC Connector.

Table 2.  
I/O Interface

Signal Name / Description	PIN #	Signal Level	
		Asserted	De-Asserted
<b>INPUTS</b>			
Input Reserve 1	14	Do Not Use	
ANALOG INPUT Only used in PLC EXT mode Sets Emitter Intensity level (0~1V=0% output, 1V=10% output, 10V=100% output)	12	0~10 VDC	N/A
INTERLOCK	11	0 VDC, GND	(Open)
PLC ENABLE	1	0 VDC, GND	(Open)
Emitter 1 ON	3	0 VDC, GND	(Open)
Emitter 2 ON	5	0 VDC, GND	(Open)
PRG/EXT	13	0 VDC, GND(EXT)	(Open)(PRG)
INHIBIT 1	7	0 VDC, GND	(Open)
INHIBIT 2	9	0 VDC, GND	(Open)
<b>OUTPUTS</b>			
PLC POWER (1) (24V, 50mA maximum)	22	Always On	
WARNING	15	0 VDC, GND	Open
EMITTER 1 STATE	17	0 VDC, GND	Open
EMITTER 2 STATE	19	0 VDC, GND	Open
Output Reserve 1, Output Reserve 2	21,20	Do Not Use	
RETURNS (These pins are common and may be used interchangeably)			
COM	2,4,6,8,10,16 ,18	Common Grounds	

(1) PLC power channel is a 24V source available for use to drive PLC logic but must be current limited using pull-down resistors to protect the BlueWave FX-1250 when directly attached to the I/O channels through the PLC connector.

(2) CHASSIS Ground connections do not share a common connection with signal returns and cannot be interchanged with signal returns.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ [Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm](#)

**PLC UV Control**

PLC switching may be driven by manual switch, relay, or optical coupler. Only analog Intensity uses a voltage input to the PLC.

To use the PLC mode, the **PLC ENABLE** (input pin 1) must be pulled down to low by grounding to the **COM** ground point.

The **PLC INTERLOCK** (input Pin 11) disables all the UV output when it is de-asserted. It is pulled down before other control signal in PLC mode.

The **PLC INHIBIT 1** (input Pin 7) and **INHIBIT 2** (input Pin 9) disables each channel's UV output when it is de-asserted. After the **INTERLOCK** is pulled down, the **INHIBIT 1** or **INHIBIT 2** is also pulled down.

After above signals are pulled down, the PLC can control the UV on/off using the **Emitter 1 ON** (input Pin 3) or **Emitter 2 ON** (input Pin 5). When this Input is pulled down by grounding to **COM** ground, the UV LED will turn on.


The PLC can also control the intensity of the UV output.

- When the **PRG/EXT** (input Pin 13) is pulled down low by grounding to **COM** ground, the Intensity will be controlled by the **EXTERNAL ANALOG INTENSITY** input voltage.

- The **ANALOG INPUT** (input Pin 12) is an analog voltage input. The voltage range is 0 to 10VDC.

Any setting below 1 VDC will set the Intensity to 0% and each 1V additional volt increases Intensity by 10%. (Example: 1V = 10%, 5V = 50%, 10V = 100%). The example connection for the PLC control signal is shown in Figure 17.

Figure 17.  
PLC Connection Example

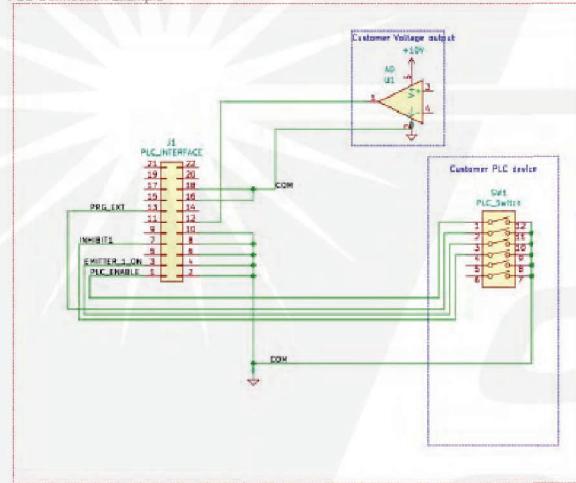

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ [Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm](#)

## Status Output

There are three status outputs. They are driven by an optical coupler. These outputs work in any mode and can be used as status inputs for PLC or any status display/monitor purpose.

- **WARNING** - Output low indicates the unit is working normally.
- **Emitter 1 & 2 State** - Output low indicates the UV LEDs are ON.

An example application of these signals is shown in Figure 20. PLC Power channel is a 24V source available for use to drive PLC logic but must be current limited using pull-down resistors to protect the FX-1250 when directly attached to the I/O channels through the PLC connector. The support current is 50 mA max

Figure 20.  
Status Outputs Connection Using On-Board 24V Source

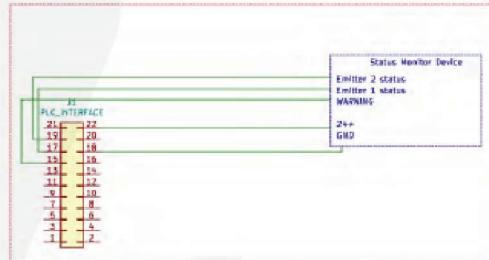


Figure 21.  
PLC Status Outputs Using Customer-Supplied 24V Source

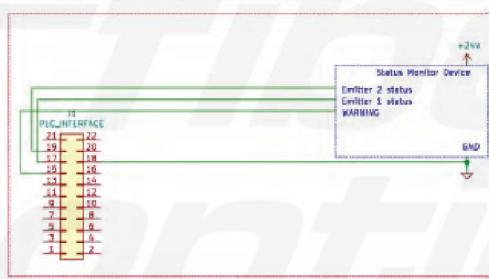
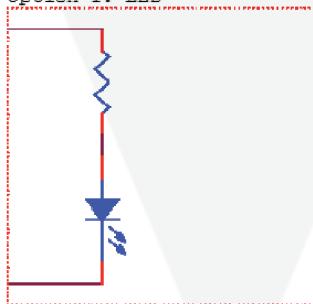
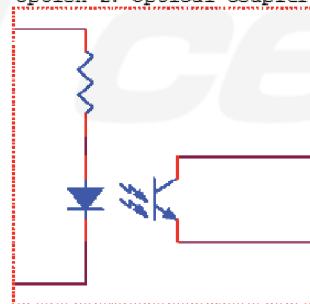
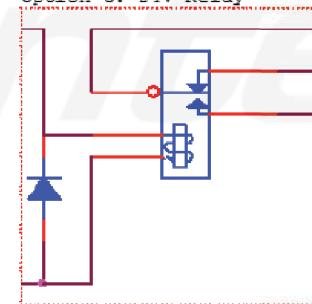


Figure 22.  
Examples of Customer Configurations for Monitoring Outputs

**Status Monitor Device****Option 1: LED****Status Monitor Device****Option 2: Optical Coupler****Status Monitor Device****Option 3: 24V Relay**

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

## Operation

**Start Up**

1. Verify all connectors are firmly plugged into the rear panel of the BlueWave FX-1250 controller and emitter.
2. On the rear panel of the controller, move the power switch to the ON position (up direction).
3. The start-up window (Figure 23) will appear for several seconds as the system initializes.
4. After starting up, the main window (Figure 24) appears.

**WARNING!** Emitters must be installed correctly before power up. If no emitter is installed, the controller is not operable. Power off the controller and install at least one emitter.

5. The system is now ready to have emitter parameters set.

**Main Window Settings**

In the main window, the operator can:

1. Set each channel's power and cure time.
2. Start or stop each channel or all channels.

**Figure 24.**

Main Window

**Table 3.**  
Main Window Functions

Number	Name	ICON	Description
1	System setting		Press to enter the system setting window to set the system parameters (clock, calendar, password, LED on time, brightness).
2	Calendar and clock		Display clock and calendar.
3	Progress bar		If the cure time is not zero, the green bar increases to indicate the progress of a cure time count. If the cure time is zero, the green bar does not increase. LED on time displays the total time the LED has been on.
4	Play/Stop button		Each channel controls one emitter. The green color indicates the emitter is on. ▶ is pressed to start the emitter. ⏸ is pressed to stop the emitter. The red indicates the emitter is off when you just plug one emitter. The dark grey indicates no emitter is plugged in. Power off the controller to install an emitter. The red and dark grey play button have no function when pressed.
5	Emitter & parameters		Each channel can be connected to an emitter. It displays the channel number on top.
6	Power and type button		Displays the channel number, emitter type, power set. The display will be one of four colors: Blue = RediCure, Black = VisiCure Grey = PrimeCure Red = NA Press to set the power of this channel. If no emitter is plugged in, the channel displays NA.
7	Timer		Counts down to zero if the cure time is not zero. Counts up if the cure time is zero. Press to set the cure time.
8	Program		Press to save and load stored setting parameters.
9	Stop button		Press to stop all emitters.
10	Run button		Press to start all emitters. When at least one of the emitters is on, the 'RUN' turns to 'RUNNING'.

**Figure 23.**  
Start-Up Window

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Setting the Power**

The operation steps are:

1. On the main window, press the power button (Table 3, #6) to enter the power window (Figure 25).
2. Enter the desired value using the pad and press enter. (10%–100%). The new value will display in the bar.
3. If no change is needed, press the back arrow in the top left corner to exit the power window.

**Setting the Cure Time**

1. On the main window, press the timer (Table 3, #7) to enter the cure time window (Figure 26).

2. Enter the desired value using the pad and press enter. (0–9999 seconds). The new value will display in the bar.

Set the cure time to 0 sec. to run the emitter until it is manually stopped.

Set a value greater than 0 sec. to run the emitter automatically for that duration.

Cure times can be set in intervals of 0.1 sec.

3. If no changes are needed, press the back arrow in the left top corner to exit the cure time window.

**Running the System**


1. After power and cure time have been set, the emitters can be run.

2. Each emitter channel can be operated separately using the play/stop button (Table 3, #4) on the main window.

3. To operate all emitter channels together, the run (Table 3, #10) and stop (Table 3, #9) buttons on the main window can be used to start and stop the emitters.

**Program Setting**

To save your set values in the main window, press program (Table 3, #8) on the main window to enter the program setting window. You are required to enter the user's password correctly before the program window (Figure 27) loads.

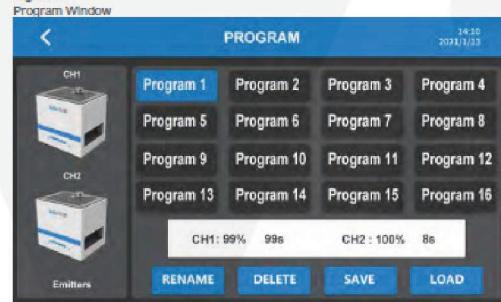**Figure 27**

There are 16 slots for selection. Their default names are Program # (1–16). Only one slot can be selected at a time.

The operation steps are:

1. Press on a program slot. The program slot will change to blue when selected. The parameters stored in that program slot will display in the white bar.
2. Press the Rename button to rename the slot.
3. Press the Save button to save the current set values (channel number, power, and cure time) to that program slot.
4. Press the Load button to load the slot's value and exit to the main window.
5. Press the Delete button to erase a slot's name and set the stored values of the slot to 0.
6. Press the back arrow in the top left corner to exit the program window.

**Settings**

Press the system setting button on the main window. A password input window (Figure 28) will appear. The password must be entered to enter the System Settings window.

Press the Input bar on the password input window to activate the keyboard (Figure 29).

The default password is set to "1234".

**Figure 28.****Figure 29.**

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848


▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Once the password is entered, the System Settings window (Figure 30) will appear.

Figure 30.  
System Settings Window



Figure 31.  
Brightness Adjustment Bar

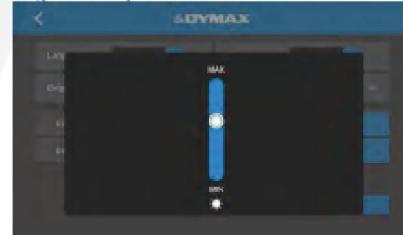**Brightness**

1. On the system settings window, press on the brightness dropdown button (Figure 31).
2. Move the bar up and down to adjust the brightness of the screen.
3. Press the back arrow in the left top corner to exit.

**Clock and Calendar Settings**

1. On the system settings window, press the time dropdown arrow.
2. Press the clock in the window to input the date and time by using the pad.
3. Press the back arrow on the top left to exit.

**Resetting the Emitters' LED ON Time**

The emitter on time appears in the gray bar (Figure 33) on the System Settings window.

Once the emitter is on, the LED on time will begin counting. If an emitter is changed for a channel, the LED on time must be cleared for it to recount in that channel.

Press the Reset button located to the right of the emitter LED on time to clear it.

**Changing the Password**

1. Press the change Password button on the system settings window to enter the Change Password window.
2. Press New Password to input the new password.
3. Press "Confirm New Password" and input the new password again. The two input passwords must be the same.
4. Press the back arrow in the left top corner to exit.

**System Reset**

Press the System Reset button on the System Settings window to:

- Reset the password to the default:1234
- Reset the program names and values to the default

Figure 32.  
Clock and Time Input Pad



Figure 33.  
Emitter On Time



Figure 34.  
Change Password Window



Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**System Log****Checking the Alarm History Log**

To check the alarm history log, press the Alarm Log window. The error window will appear (Figure 35).

*Note: The alarm records are only updated. They can't be deleted. The lines show the date and time of the alarm, and the code to describe the reason for the alarm.*

The controller can save a maximum of 100 records. When over 100 alarms have been recorded, the next number is overlaid by the new alarm.

Press the Back arrow to return to the main window.

**When the Controller Alarms**

When the controller alarms, the controller is forced to enter the Alarm window. The Alarm button appears in the bottom. Press the Turn Off Button (Figure 36) to enter the Alarm Log window.

After the alarm code is checked, press the Back arrow to return to the main window.

An alarm icon will appear on the left of the stop button. Navigate to the log window directly by pressing the button. (Figure 37)

When an alarm occurs, the emitters are stopped, and the controller emits a beep.

Press the Reset button to turn off the beep and disable the alarm.

**WARNING!** Power off before checking the controller and emitters.

When any emitter's temperature is over 60°C, a warning screen pops up (Figure 38). It is a warning message only.

Press the Turn Off Button to close the warning screen. The warning will also automatically close when the emitter temperature returns to 60°C.

The emitter will automatically shut down if the maximum allowable temperature is reached.

**Figure 35.****Error Window****Figure 36.****Alarm Button****Figure 37.****Main Window with Alarm Button****Figure 38.****High Temperature Warning Screen****Table 4.**  
Alarm Codes and Description

Alarm Code	ALARM message	Cause
0x1000	Ctrl Over Temperature (>50°C)	The controller temperature is too high.
0x2000	EM x (1,2) not installed	Emitter connection has problems after power up.
0x2001	EM x (1,2) fan error	Emitter fan has no speed.
0x2002	EM x (1,2) over temperature (> 69°C)	Emitter temperature is too high.
0x2003	EM x (1,2) over current	Emitter current is too high.
0x2004	EM x (1,2) zero output	Emitter has no current output.

**PLC Mode**

There are 2 working modes:

**Program:** This is the default mode and is operable by the touch screen. Parameters can be stored in the program slots and called for operation. The parameters can be stored in the program slots and called for operation. This is the default mode for the touchscreen.

**PLC:** The system can be controlled by PLC. This mode is triggered by the PLC ENABLE input signal. Please follow the wiring guide in "PLC Control" on page 10.

Once the PLC mode is on, the PLC mode window (Figure 39) displays.

**Figure 39.****PLC Mode Window**

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Data is subject to change without notice. FOC last update 2/5/2026.*

# USER GUIDE


**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ [Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm](#)

Table 5.  
PLC Mode Signals

Signal Name / Description	Pin #	Signal Color	
		Asserted	De-Asserted
<b>INPUTS</b>			
INTERLOCK	11	GREEN	RED
PLC ENABLE	1	GREEN	RED
LED ON1	3, Emitter 1 ON	GREEN	BLACK
LED ON2	5, Emitter 2 ON	GREEN	BLACK
PRG/EXT	13	(EXT), GREEN	(PRG), RED
INHIBIT 1	7	GREEN	RED
INHIBIT 2	9	GREEN	RED
<b>OUTPUTS</b>			
WARNING	15	GREEN	RED
STATUS 1	17, Emitter 1 STATE	GREEN	BLACK
STATUS 2	19, Emitter 2 STATE	GREEN	BLACK
<b>CHANNELS</b>			
Emitter & Parameters		Each channel has an emitter. It displays the channel number, emitter temperature, power, and cure time. If no emitter is plugged in, the channel displays NA,0°C,0.0.	

## Spare Parts & Accessories

### Accessories

Item	Part Number
<b>Personal Protection Equipment</b>	
Protective Goggles — Green	35286

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE



## Manufacturer:

Dymax

## Product Name:

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

## Manufacturer Part Number:

88848

▶ [Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm](#)


## Specifications



Property	Specification		
Emitter	RediCure	PrimeCure	VisiCure
Output Wavelength	365 nm	385 nm	405 nm
Irradiance Output at 25-mm Working Distance*	1.7 W/cm <sup>2</sup>	2.1 W/cm <sup>2</sup>	2.0 W/cm <sup>2</sup>
Curing Area	5" x 5" [127 mm x 127 mm]		
Power Requirements	100-240 V~, 50/60 Hz   1CH Controller: 850 W   2CH Controller: 1700 W		
Cooling	Air cooled		
Dimensions (W x D x H)	1CH Controller: 15" x 12.6" x 6.5" [380 mm x 320 mm x 166 mm] 2CH Controller: 16.5" x 13.8" x 6.5" [420 mm x 350 mm x 166 mm] Emitter: 6.7" x 5.3" x 6" [170 mm x 134 mm x 152 mm]		
Weight	1CH Controller: 28.2 lb. [12.8 kg] 2CH Controller: 43.7 lb. [19.8 kg] Emitter: 8.8 lb. [4 kg]		
Unit Warranty	1 year from purchase date		
Operating Environment	10°C to 40°C (50°F to 104°F) 0 - 80% relative humidity, non-condensing (recommended: 30% RH) 2,000-meter max. altitude		
Shipping and Storage Conditions	Temperature: -20°C to +50°C Humidity: 10 - 80% RH, non-condensing Ship via standard ground, ocean, or air freight		
Certifications	RoHS, CE Marked, UKCA, EMC and Low Voltage		

\* Measured using a Dymax ACCU-CAL™ 50-LED radiometer in flood mode at 25-mm working distance.

Figure 40.  
Dimensions

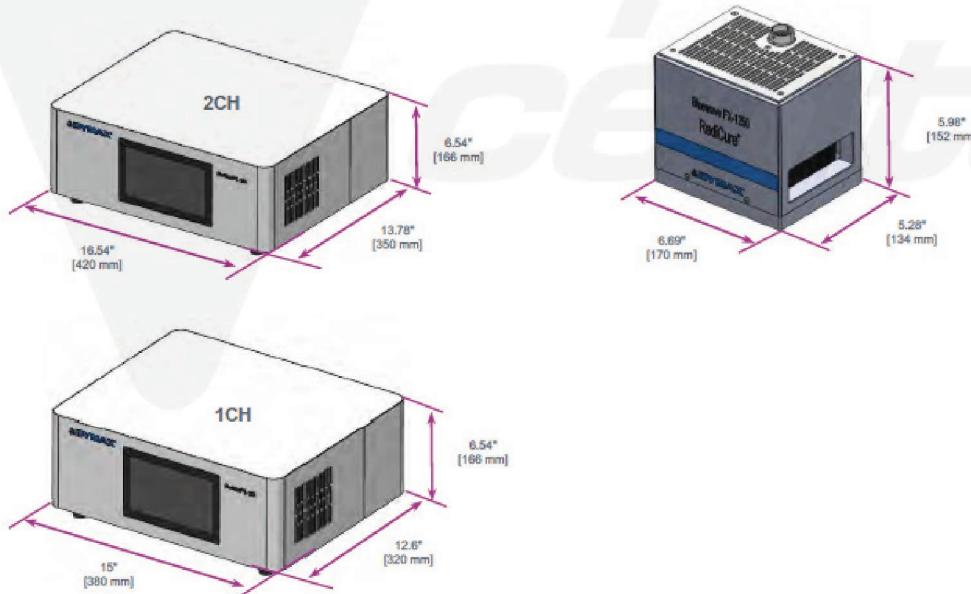

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**


Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Figure 41.**  
Mounting Hole Locations and Size

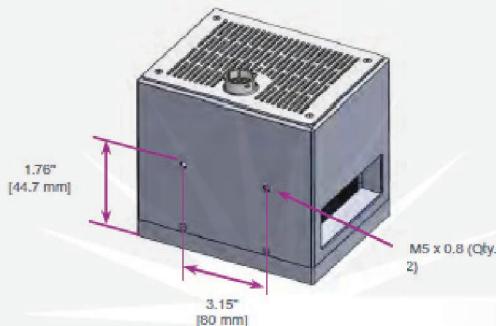

**Figure 42.**  
Mounting Stand (PN 88844)



Mounting stands are sold separately. Emitters can be mounted on mounting stand with two M5 screws included with the mounting stand.

**Table 6.**  
Operation Timing

Input Event	Out Event	Test Condition	Maximum Time Delay
LED ON/OFF Change to Low	UV LED ON	PLC Mode	20 ms
	LED STATE Output Change to LOW		25 ms
LED ON/OFF Change to High	UV LED OFF		30 ms
	LED STATE Output Change to High		40 ms
LED ON/OFF (Closed)	UV LED ON	Manual Mode	150 ms
	LED STATE Output Change to LOW		180 ms
LED ON/OFF (Open)	UV LED OFF		25 ms
	LED STATE Output Change to High		50 ms
LED ON/OFF Asserted (Change from Open to Closed)	UV LED ON	Timer Mode UV LED Is OFF	140 ms
	LED STATE Output Change to Low		150 ms
	UV LED OFF	Timer Mode Before Timer Expired UV LED Is ON	140 ms
	LED STATE Output Change to High		160 ms

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

## Validation

Tests should be conducted prior to production to determine the time and light intensity required to fully cure your resin. The following approaches may be used to validate the curing process.

### Set Exposure Time, Determine Intensity

Users can specify a cure time and, through empirical testing, determine the intensity required to achieve a full cure. As with any manufacturing process, it is advisable to incorporate a safety factor.

### Set Intensity, Determine Exposure Time

Users can specify light intensity and, through empirical testing, determine the exposure time required to achieve a full cure. As with any manufacturing process, it is advisable to incorporate a safety factor.

***NOTE:** Dymax recommends intensities low at first to preserve LED life.*

Contact the Dymax Application Engineering Team for additional process support.

## Control

Process validation confirms a minimum acceptable intensity. Users can then choose to operate at full intensity (using the excess intensity as an additional safety factor) or adjust the output to a specific intensity level. To ensure consistent and repeatable process results, intensity levels should be monitored with a radiometer. This enables users to identify light intensity changes and take corrective action (either adjusting the light intensity or performing maintenance).

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Declaration of Conformity**

Figure 43.  
Declaration of Conformity - CE

EU Declaration of Conformity

## Manufacturer:

Hanarey Chemicals (Shanghai) Co., Ltd.  
No.111 Muhua Road, Fengxian District,  
Shanghai, China 201507

Product description:  
Model name(s):

UV Flood Curing Device  
BlueWave FX-1250 Controller 1CH/2CH  
BlueWave FX-1250 Emitter RediCure/ PrimeCure/ VisiCure  
BlueWave FX-1250 Interconnect cable I&L/ L&L

*This product complies with the following relevant Union Harmonization Legislation:*

Electromagnetic Compatibility Directive (2014/30/EU):  
EN 55011:2016+A1:2017+A11:2020  
EN 61000-3-2:2014 Class A  
EN 61000-3-3:2013  
EN 61326-1:2013

Low Voltage Directive (2014/35/EU):  
EN 61010-1:2010+A1:2019  
EN 62471:2008

RoHS Directive 2011/65 EU (incl. (EU) 2015/863)  
EN IEC 63000:2018

**Declaration:**

This declaration of conformity is issued under the sole responsibility of the manufacturer.  
Signed for and on behalf of Hanarey Chemicals (Shanghai) Co., Ltd

Name

Date

Location

Authorized Signatory:

Kyle Zhu  
Senior Manager, Equipment Development  
Hanarey Chemicals (Shanghai) Co., Ltd.



North America: +1 860-482-1010 | Europe: +49 511-962-7900 | Asia: +65-67522887

© 2017-2022 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A. Please note that Dymax equipment and curing systems are a specialty tool for certain applications. Dymax does not warrant the use of its products for the manufacture of products to be resold. Its application and use is entirely the sole function of the individual customer. In the event of a technical question or sale, Dymax recommends that any individual or reseller contact the vendor to whom that vendor's performance information was sold. Dymax is willing to assist users in their performance testing and evaluation by offering measurement and analysis programs to determine test performance and validation. Dymax does not warrant the use of its products to produce certain item(s) required.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Data is subject to change without notice. FOC last update 2/5/2026.*

# USER GUIDE



**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Figure 44.**  
Declaration of Conformity – UK CA



**DYMAX**

North America: +1 860 482 1010 | Europe: +49 611 962 7900 | Asia: +65 67522987

© 2021-2022 Dynas Corporation. All rights reserved. All trademarks in the quote are copyrighted, are the property of, or used under license by Dynas Corporation, U.S.A. Permissions that are required and/or specific system requirements are exigent. Dynas does not warrant the performance of the product for its intended application. Any warranty-explicit or implied, in plain or implied form, is hereby limited to the duration of the implied or Conditional 5-Year Dynas warranty. Any verbal application is evaluated on a case-by-case basis and is subject to the terms and conditions of the Dynas warranty. Dynas reserves the right to make changes to its products without notice or obligation.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. EOC last update 2/5/2026

# USER GUIDE

**Manufacturer:**

Dymax

**Product Name:**

Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

**Manufacturer Part Number:**

88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

## Warranty

From date of purchase, Dymax Corporation offers a one-year warranty against defects in material and workmanship on all system components with proof of purchase and purchase date. Unauthorized repair, modification, or improper use of equipment may void your warranty benefits. The use of aftermarket replacement parts not supplied or approved by Dymax Corporation, will void any effective warranties and may result in damage to the equipment.

**IMPORTANT NOTE:** DYMAX CORPORATION RESERVES THE RIGHT TO INVALIDATE ANY WARRANTIES, EXPRESSED OR IMPLIED, DUE TO ANY REPAIRS PERFORMED OR ATTEMPTED ON DYMAX EQUIPMENT WITHOUT WRITTEN AUTHORIZATION FROM DYMAX. THOSE CORRECTIVE ACTIONS LISTED ABOVE ARE LIMITED TO THIS AUTHORIZATION

© 2022-2024 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application.

Dymax recommends that any

Intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied.

MAN120 3/13/2024

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Data is subject to change without notice. FOC last update 2/5/2026.