



**Manufacturer:**  
AFL

**Product Name:**  
AFL CT16 Dual Fiber Cleaver (125um)

**Manufacturer Part Number:**  
S018330



▶ [Click here for more details on the AFL CT16 Dual Fiber Cleaver \(125um\)](#)

## Fujikura 45S Fusion Splicer

The 45S cladding alignment fusion splicer is changing the way people splice fiber in small to mid-fiber count applications. This Fujikura splicer debuts a landmark improvement to the fusion splicing process with the ability to prepare and load both fibers simultaneously. The hand-held fiber coating stripper, the SS-05, is capable of stripping two 250 µm coated fibers in the same pass, along with the CT-16A cleaver adapter plate which can likewise accommodate two bare fibers for cleaving. After preparation, the 45S patented sheath clamps enable loading both fibers simultaneously into the splicer with one fiber in each hand. The user can press down on the sheath clamp base to close it while positioning the fiber in the V-grooves. This enables one-handed operation.

Furthermore, the 45S sheath clamps are mechanically linked to the wind protector, so after splicing is finished, opening the wind protector also opens both sheath clamps for quick sleeve positioning and transfer to the tube heater. The 45S tube heater shrinks sleeves much faster than its predecessor with a nominal ~20 second heat time for 60 mm sleeves down from ~26 seconds. The simultaneous fiber preparation capability, automated sheath clamp opening, and a faster tube heater, combine to lower the overall fusion splicing cycle time by ~30% or more.

The 45S continues to benefit the user experience with improvements to fiber placement, battery access, and machine ergonomics. Previously, when using sheath clamps, if the cleaved fiber was accidentally set past the electrode centerline, the machine would send an error and require manual intervention. The 45S will now accept this mistake and reverse the fiber to correct position automatically. With a cube form factor, the 45S is easily transported and operated in space-constrained environments. The adjustable screen can alleviate glare from the sun and adjust with abnormal splicer positions confronted in challenging splice locations.

### Features


- Simultaneous fiber preparation with newly patented sheath clamp design
- Sheath clamps automatically opened with the wind protector
- Automatic fiber placement correction
- Active Fusion Control for arc optimization with every splice
- Active Blade Management for cleave quality monitoring and correction
- Easy-access battery, screen position adjustments, and ergonomic adaptations
- Fully ruggedized for shock, moisture and dust resistance

### Applications

- 5G Small Cell Site
- FTTx drops and terminations
- MDF/IDF splices and terminations
- Rural fiber deployments and restorations



45S

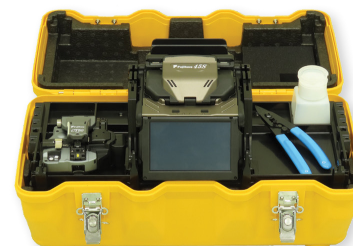

45S Standard Kit



45S on Tripod

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*



**Manufacturer:**  
AFL


**Product Name:**  
AFL CT16 Dual Fiber Cleaver (125um)

**Manufacturer Part Number:**  
S018330


▶ [Click here for more details on the AFL CT16 Dual Fiber Cleaver \(125um\)](#)

## Fujikura 45S Fusion Splicer


### Features




Simultaneous Fiber Loading




Sleeve Positioning



Work Tray with Neck Strap



CT-16A Adapter Plate on CT-50

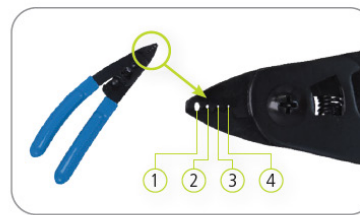

Fiber stripper SS-05

- ① For 2.3 mm
- ② For 900 μm
- ③ For 250 μm
- ④ For 250 μm

### Ordering Information

DESCRIPTION	AFL NO.
<b>Fujikura 45S Standard Kit includes:</b> CT-50 cleaver, SS-05 single fiber stripper, 1 pair each FH-70-250 and FH-70-900 fiber holders, FH-FC-900 (900 μm cable), SP-04 set plates, ELCT2-16B Spare Electrodes (Pair), ADC-21 AC Adapter, BTR-17 Battery Pack (installed), ACC-09 Power Cord, USB-01 USB Cable, AP-02 Alcohol Container, WT-10 work tray, ST-03 carrying case strap, TS-03 tripod screw, CC-45 Transit Case, 1-year factory warranty, and instruction manual downloaded from splicer	S018318
<b>Fujikura 45S Kit without Cleaver includes:</b> SS-05 single fiber stripper, 1 pair each FH-70-250 and FH-70-900 fiber holders, SP-04 set plates, ELCT2-16B Spare Electrodes (Pair), ADC-21 AC Adapter, BTR-17 Battery Pack (installed), ACC-09 Power Cord, USB-01 USB Cable, AP-02 Alcohol Container, WT-10 work tray, ST-03 carrying case strap, TS-03 tripod screw, CC-45 Transit Case, 1-year factory warranty, and instruction manual downloaded from splicer	S018319

### Recommended Accessories

DESCRIPTION	AFL NO.	DESCRIPTION	AFL NO.
<b>Cleavers and Strippers</b>		<b>Power Supply Options</b>	
CT-50 Fiber Cleaver	S017030	BTR-17 Battery Pack	S018324
CT-16 Fiber Cleaver	S018330	ADC-21 AC Adapter	S018168
<b>Fiber Holders</b>		ACC-09 Power Cord	S014390
CLAMP-S35B Loose Buffer Tube Clamp	S018333	<b>Miscellaneous</b>	
FH-70-250 (250 μm single fiber)	S017111	ELCT2-16B Electrodes	S017103
FH-70-900 Fiber Holders (900 μm single fiber)	S017113	Splicer V-Groove Cleaning Kit	S014397
FH-60-LT900 (900 μm loose buffer tube)	S015181		

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*



**Manufacturer:**  
AFL

**Product Name:**  
AFL CT16 Dual Fiber Cleaver (125um)

**Manufacturer Part Number:**  
S018330

▶ [Click here for more details on the AFL CT16 Dual Fiber Cleaver \(125um\)](#)

## Fujikura 45S Fusion Splicer

### Specifications

PARAMETER		VALUE
Fiber alignment method		Active cladding alignment
Fiber count can be spliced		Single fiber
Applicable fiber	Fiber type	Single-mode optical fiber
	Cladding dia.	Multimode optical fiber
Applicable coating	Sheath Clamp	Approx. 125 µm
	Fiber Holder	Coating diameter: Max. 3,000 µm
		Cleave length: 5 to 16 mm <sup>*1</sup>
Fiber splice performance		Coating diameter: 160 µm – 3,000 µm based on available fiber holder options
Fiber splice performance	Splice loss <sup>*2</sup>	Cleave length: Approx. 10 mm
		ITU-T G.652: Avg. 0.03dB
		ITU-T G.651: Avg. 0.01dB
		ITU-T G.653: Avg. 0.05dB
		ITU-T G.655: Avg. 0.05dB
Applicable protection sleeve	Splicing time <sup>*3</sup>	ITU-T G.657: Avg. 0.03dB
		SM FAST mode: Avg. 6 to 7 sec.
Sleeve heat performance	Sleeve type	SM AUTO mode: Avg. 8 to 10 sec.
	Sleeve length	Heat shrinkable sleeve
	Sleeve dia.	Max. 66 mm
Fiber tensile test force	Heat time <sup>*4</sup>	Max. 6.0 mm before shrinking
		60 mm mode: Avg. 15 to 22 sec.
Electrode life <sup>*5</sup>		60 mm slim mode: Avg. 15 to 17sec.
Physical description		Approx. 2.0 N
	Dimensions W	Approx. 6,000 splices
	Dimensions D	Approx. 131 mm without projection
	Dimensions H	Approx. 123 mm without projection
	Weight	Approx. 121 mm without projection
Environmental condition	Temperature	Approx. 1.4 kg including battery
	Humidity	Operate : -10 to 50°C
		Storage : -40 to 80°C
AC adaptor	Input	Operate : 0 to 95% non-condensing
	Output	Storage : 0 to 95% non-condensing
Battery pack	Type	Max. 5,000 m
	Output	AC 100 to 240V, 50/60Hz, Max. 1A
	Capacity <sup>*6</sup>	Approx. DC 19V, Max. 2.1A
		Rechargeable Lithium Ion
	Display	Temperature
Battery life <sup>*7</sup>		60 mm heat mode: Approx. 200 splice & heat cycles
		Approx. 500 recharge cycles
Illumination	LCD monitor	60 mm slim heat mode: Approx. 230 splice & heat cycles
	Magnification	Operate: -10 to 50°C
Interface	V-grooves	Recharge : 0 to 40°C
	PC	Short term storage of 30 days: -20 to 50°C
	External LED lamp	Long term storage: -20 to 30°C
	Wireless <sup>*8</sup>	Approx. 132 to 300X

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.



Manufacturer: AFL
Product Name: AFL CT16 Dual Fiber Cleaver (125um)
Manufacturer Part Number: S018330

Click here for more details on the AFL CT16 Dual Fiber Cleaver (125um)

Fujikura 45S Fusion Splicer

Specifications

Table with 3 columns: PARAMETER, VALUE, and a central column for details. Rows include Data storage, Screw hole for tripod, and Other features.

- \*1 Cleave length range depending on fiber type
\*2 Measured with cut-back method relevant to ITU-T and IEC standard after splicing Fujikura identical fibers.
\*3 Measured at room temperature. The definition of splice time is from the fiber image appearing on the LCD monitor to the estimated splice loss.
\*4 Measured at room temperature with the AC adapter. The heat time is defined from the start beep sound to the finish beep sound.
\*5 The electrode life changes depending on the environmental conditions, fiber type, and splice modes used.
\*6 Test Conditions
\*7 The battery capacity decreases to half after approx. 500 discharge and recharge cycles.
\*8 Bluetooth mark and logos are registered trademarks of Bluetooth SIG, Inc.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.