Manufacturer:
Dymax®

Product Name:
Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Manufacturer Part Number:
88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Click the thumbnail below to navigate to the drawing.

FX1250 Controller 1CH OVER SIZE

FX1250 Emitter OVER SIZE
(RediCure,PrimeCure,VisiCure)

Cable, FX1250, 2M
Type I to L

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

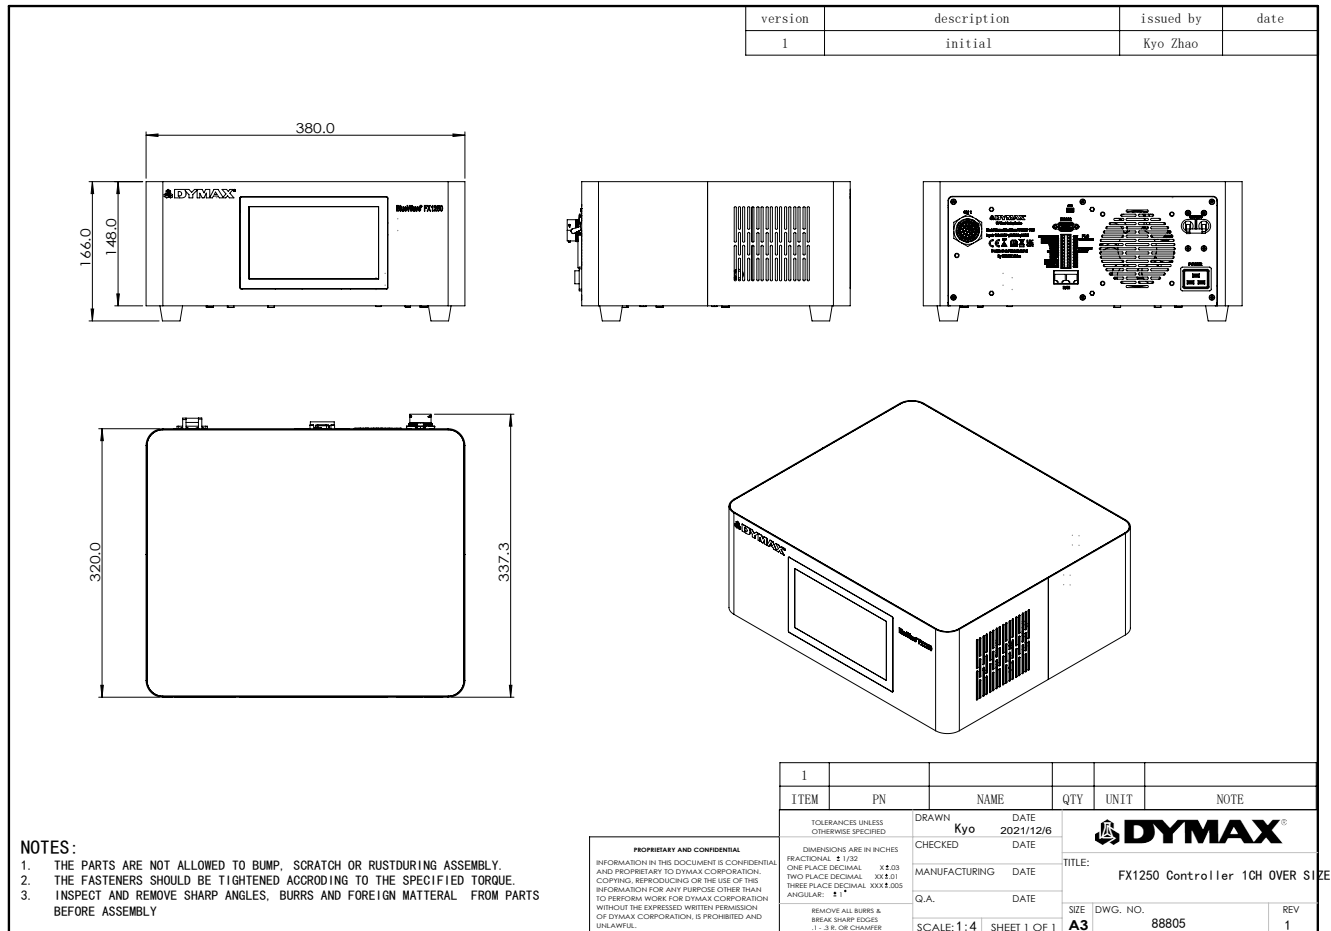*Product specifications and data are subject to change without notice.*

Manufacturer:
Dymax®

Product Name:
Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Manufacturer Part Number:
88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

version	description	issued by	date
1	initial	Kyo Zhao	

380.0

166.0

148.0

320.0

337.3

NOTES:
1. THE PARTS ARE NOT ALLOWED TO BUMP, SCRATCH OR RUSTDURING ASSEMBLY.
2. THE FASTENERS SHOULD BE TIGHTENED ACCRODING TO THE SPECIFIED TORQUE.
3. INSPECT AND REMOVE SHARP ANGLES, BURRS AND FOREIGN MATTERAL FROM PARTS BEFORE ASSEMBLY

PROPRIETARY AND CONFIDENTIAL

INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROPRIETARY TO DYMAX CORPORATION. COPYING, REPRODUCING OR THE USE OF THIS INFORMATION FOR ANY PURPOSE OTHER THAN TO PERFORM WORK FOR DYMAX CORPORATION WITHOUT THE EXPRESSED WRITTEN PERMISSION OF DYMAX CORPORATION, IS PROHIBITED AND UNLAWFUL.

ITEM	PN	NAME	QTY	UNIT	NOTE
1					

TOLERANCES UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES
FRACTIONAL ± 1/32
ONE PLACE DECIMAL X ±.03
TWO PLACE DECIMAL XX ±.01
THREE PLACE DECIMAL XXX ±.005
ANGULAR: ± 1°

REMOVE ALL BURRS & BREAK SHARP EDGES
.1 – .3 R. OR CHAMFER

DRAWN	Kyo	DATE 2021/12/6
CHECKED		DATE
MANUFACTURING		DATE
Q.A.		DATE

DYMAX®

TITLE:
FX1250 Controller 1CH OVER SIZE

| SIZE A3 | DWG. NO. 88805 | REV 1 |
| SCALE: 1:4 | SHEET 1 OF 1 | |

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

Product specifications and data are subject to change without notice.

Manufacturer:
Dymax®

Product Name:
Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Manufacturer Part Number:
88848

▶ Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm
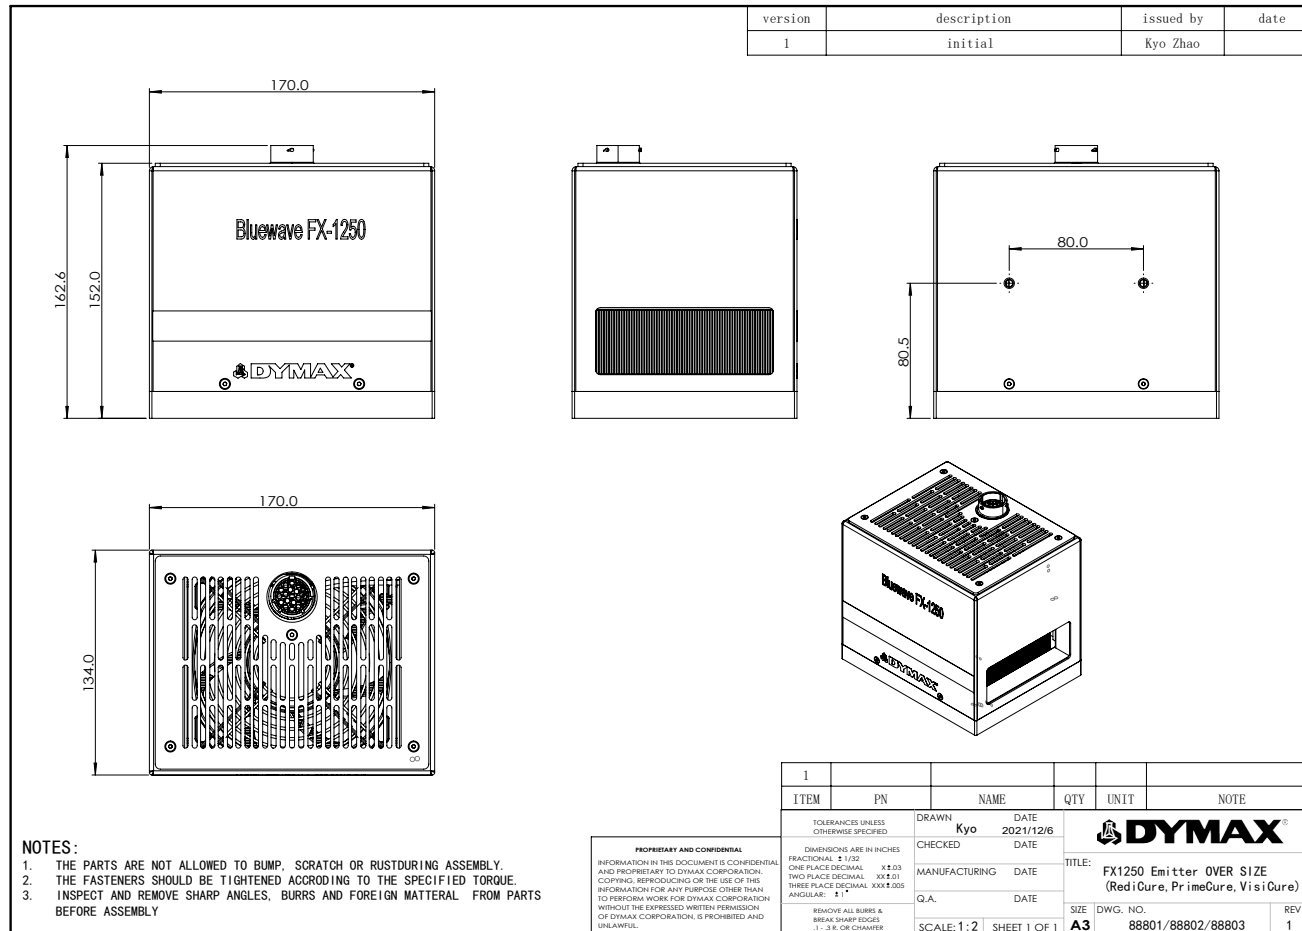
version	description	issued by	date
1	initial	Kyo Zhao	

Bluewave FX-1250

170.0

162.6
152.0

170.0

134.0

80.0

80.5

NOTES:
1. THE PARTS ARE NOT ALLOWED TO BUMP, SCRATCH OR RUSTDURING ASSEMBLY.
2. THE FASTENERS SHOULD BE TIGHTENED ACCRODING TO THE SPECIFIED TORQUE.
3. INSPECT AND REMOVE SHARP ANGLES, BURRS AND FOREIGN MATTERAL FROM PARTS BEFORE ASSEMBLY

1					
ITEM	PN	NAME	QTY	UNIT	NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN Kyo	DATE 2021/12/6	
DIMENSIONS ARE IN INCHES FRACTIONAL ±1/32 ONE PLACE DECIMAL X±.03 TWO PLACE DECIMAL XX±.01 THREE PLACE DECIMAL XXX±.005 ANGULAR: ±1°	CHECKED	DATE	TITLE: FX1250 Emitter OVER SIZE (RediCure,PrimeCure,VisiCure)
	MANUFACTURING	DATE	
	Q.A.	DATE	
REMOVE ALL BURRS & BREAK SHARP EDGES -1 - .3 R. OR CHAMFER	SCALE:1:2	SHEET 1 OF 1	SIZE A3	DWG. NO. 88801/88802/88803	REV 1

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

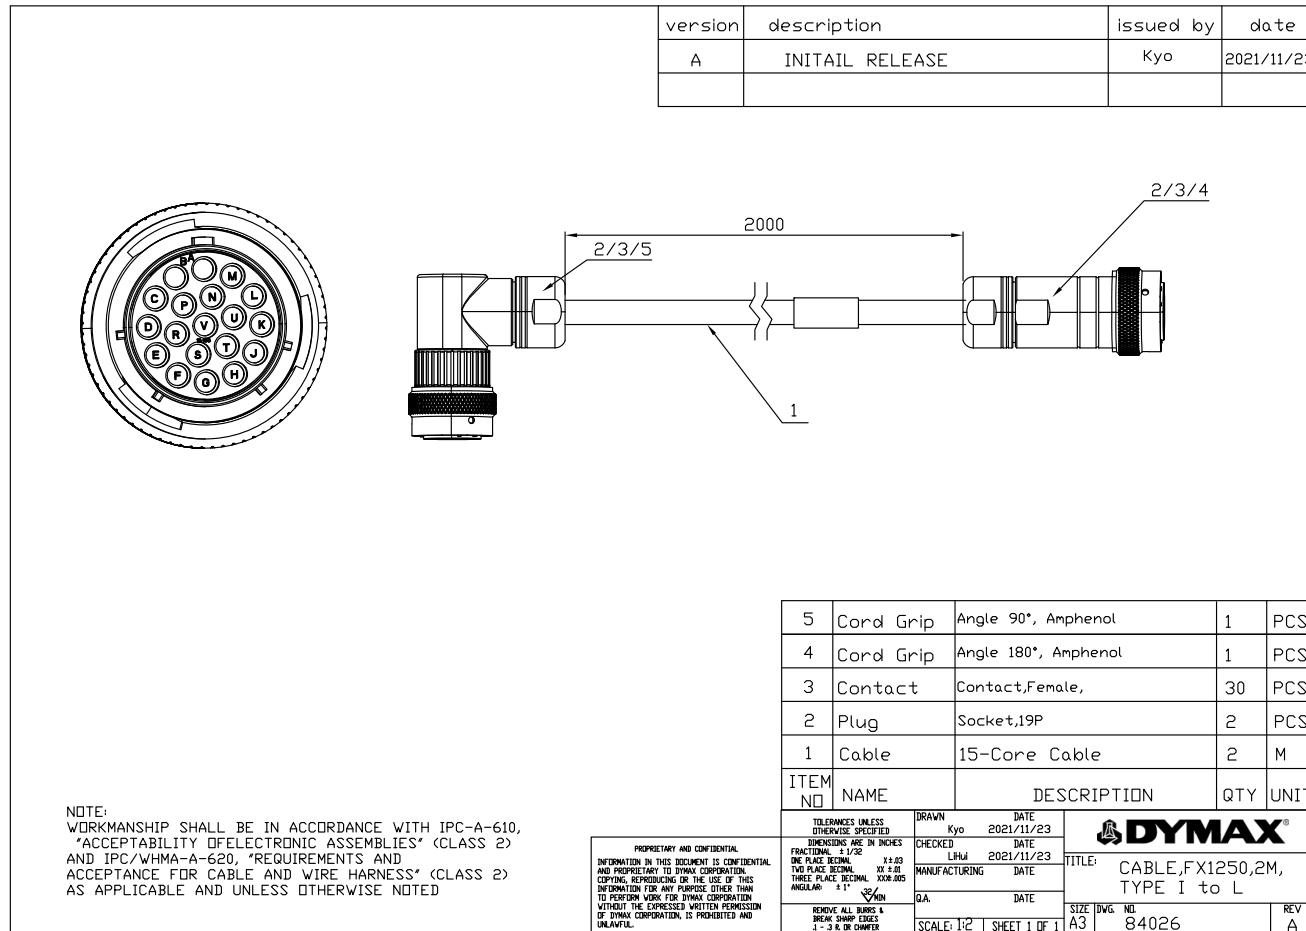*Product specifications and data are subject to change without notice.*

Manufacturer:
Dymax®

Product Name:
Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

Manufacturer Part Number:
88848

► Click here for more details on the Dymax BlueWave® FX-1250 High Intensity LED Curing Flood System - 365nm

version	description	issued by	date
A	INITAIL RELEASE	Kyo	2021/11/23

2000

2/3/5

2/3/4

1

NOTE:
WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610,
"ACCEPTABILITY OFELECTRONIC ASSEMBLIES" (CLASS 2)
AND IPC/WHMA-A-620, "REQUIREMENTS AND
ACCEPTANCE FOR CABLE AND WIRE HARNESS" (CLASS 2)
AS APPLICABLE AND UNLESS OTHERWISE NOTED

ITEM NO	NAME	DESCRIPTION	QTY	UNIT
5	Cord Grip	Angle 90°, Amphenol	1	PCS
4	Cord Grip	Angle 180°, Amphenol	1	PCS
3	Contact	Contact,Female,	30	PCS
2	Plug	Socket,19P	2	PCS
1	Cable	15-Core Cable	2	M

PROPRIETARY AND CONFIDENTIAL

INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL
AND PROPRIETARY TO DYMAX CORPORATION.
COPYING, REPRODUCING OR THE USE OF THIS
INFORMATION FOR ANY PURPOSE OTHER THAN
TO PERFORM WORK FOR DYMAX CORPORATION
WITHOUT THE EXPRESSED WRITTEN PERMISSION
OF DYMAX CORPORATION, IS PROHIBITED AND
UNLAWFUL.

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN	Kyo	DATE 2021/11/23
DIMENSIONS ARE IN INCHES FRACTIONAL ± 1/32 ONE PLACE DECIMAL X ±.03 TWO PLACE DECIMAL XX ±.01 THREE PLACE DECIMAL XXX±.005 ANGULAR: ± 1°	CHECKED	LiHui	DATE 2021/11/23
	MANUFACTURING		DATE
	Q.A.		DATE

DYMAX®

TITLE: CABLE,FX1250,2M, TYPE I to L

REMOVE ALL BURRS & BREAK SHARP EDGES .1 - .3 R OR CHAMFER

SCALE: 1:2 | SHEET 1 OF 1 | SIZE A3 | DWG. NO. 84026 | REV A

>> Return to Page 1

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

Product specifications and data are subject to change without notice.