

**Manufacturer:**

Dymax

Product Name:

Dymax OP-83-LS Low Shrinkage Epoxy, Off White Opaque to Charcoal Translucent Gel, Hybrid UV, LED & Heat Cure - 10ml Syringe


Manufacturer Part Number:

OP-83-LS-10ML



Learn More

▶ Click here for more details on the Dymax OP-83-LS Low Shrinkage Epoxy, Off White Opaque to Charcoal Translucent Gel, Hybrid UV, LED & Heat Cure - 10ml Syringe

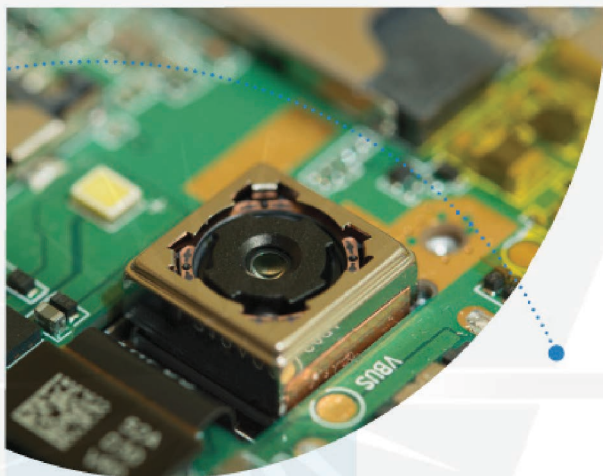


Light-Curable Materials for Camera Module Assembly

- Excellent adhesion to commonly used substrates in camera module assemblies
- Materials cure in seconds allowing faster processing and higher throughput
- Materials available for a variety of applications including active alignment, barrel fixturing, and FPC reinforcement
- Good resistance to moisture and shock

Dymax light-curable adhesives are ideal for use in the assembly of camera modules used in smart connected devices, automobiles, and industrial camera systems. Our adhesives cure in seconds, providing greater product yields in a much shorter assembly time. They provide excellent adhesion to substrates typically used in the manufacture of camera modules and electronic device housings, and can withstand harsh conditions like the moisture and shock which electronic devices are often exposed to.

Typical Camera Module Applications

- 1 - Bonding the camera lens
- 2 - Fixturing the camera lens barrel to the lens holder
- 3 - Bonding the IR filter to the lens holder
- 4 - Bonding the lens holder to the PCB
- 5 - Attaching the CCD or CMOS die to the PCB
- 6 - Reinforcing the FPC

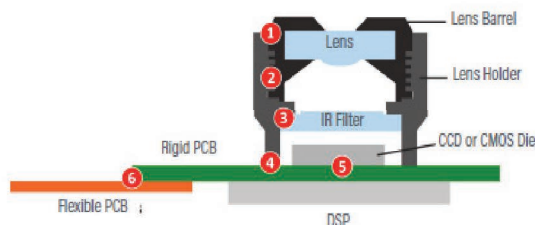

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.
FOC last update 12/16/2025.



Manufacturer:

Dymax

Product Name:

Dymax OP-83-LS Low Shrinkage Epoxy, Off White Opaque to Charcoal Translucent Gel, Hybrid UV, LED & Heat Cure - 10ml Syringe

Manufacturer Part Number:

OP-83-LS-10ML



Learn More

Click here for more details on the Dymax OP-83-LS Low Shrinkage Epoxy, Off White Opaque to Charcoal Translucent Gel, Hybrid UV, LED & Heat Cure - 10ml Syringe

Product Number	Features	Viscosity, cP	Durometer Hardness	Tensile at Break, MPa [psi]	Modulus of Elasticity, MPa [psi]	Halogen Free?
Fixturing the Camera Lens Barrel to the Lens Holder Typical requirement: Tack-free surface						
OP-81-LS	OP-series optical adhesive; UV/Visible light cure; low shrinkage epoxy; low temp. heat cure (80-85°C); moisture & thermal cycle resistant; low water absorption; cold storage/ship	60,000	D90	45 [6,600]	1,600 [230,600]	Not Tested
OP-83-LS	OP-series optical adhesive; UV/Visible light cure; very low shrinkage epoxy; low temp. heat cure (80-85°C); moisture & thermal cycle resistant; low water absorption; cold storage/ship	86,000	D94	36.7 [5,328]	3,983 [578,000]	Not Tested
3094-T-REV-A	UV/Visible light cure; fast curing; low shrinkage and stress	11,750	D65	124 [1800]	179 [26,000]	HF
3094-GEL-REV-A	UV/Visible light cure; fast curing; low shrinkage	30,000	D67	14 [2,000]	698 [101,300]	HF
Flexible PCB Reinforcement Typical requirement: Flexibility; bend resistance						
9008	UV/Visible light cure; remains flexible to -40°C; moisture resistant	4,500	D35	10 [1,500]	45 [6,500]	HF
9101	UV/Visible light cure with secondary moisture cure; flexible; moisture and thermal resistant	7,000	D30-D50	5.06 [735]	175 [2,550]	HF
Other Applications						
6-621-GEL	UV/Visible light cure with secondary heat cure; activator cure; hard, clear bonds	25,000	D80	28 [4,000]	730 [106,000]	HF
6-621-VT		14,000				
9309-SC	UV/Visible light cure; adhesion to various PCB substrates; formulated with See-Cure color-change technology	45,000	D57	22 [3,200]	163 [23,800]	HF
9483	UV/Visible light-cure with secondary moisture cure; excellent chemical and thermal shock resistance; blue fluorescing	750	D60	16.2 [2,350]	276 [40,000]	HF
6-621-T	UV/Visible light cure with secondary heat cure; activator cure; hard, clear bonds	3,500	D80	28 [4,000]	730 [106,000]	HF
9001-E-V3.0	UV/Visible light cure; low ionic; good electrical properties	400	D45	5.17 [750]	172 [2,500]	HF

Featured Product



For more information, please contact Kelly Barker | kbarker@focenter.com | www.focenter.com

©2020-2023 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, USA. Technical data provided is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale published on our website. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this communication shall act as a representation that the product use or application will not infringe on a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data in this communication as a general guideline. A8006 6/25/2023

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 12/16/2025.