

Manufacturer:
Jetting AB

Product Name:
TRIGGAIR Hand Held Fiber Blowing Machine

Manufacturer Part Number:
TRIGGAIR-CAN












▶ [Click here for more details on the TRIGGAIR Hand Held Fiber Blowing Machine](#)

TRIGGAIR

Robust handheld battery powered fiber blowing tool optimized for FTTX installation of blown fiber (EPFU) and micro/nano cables, from 0.8 to 3 mm into microduct size 3, 5, 7 and 8 mm. The effective fiber security, and adjustable clamping force secures that all cable designs can be installed effective and safe. Delivered in strong transport case with batteries, charger and an assortment of cable seals. Ready to blow!




-  **Battery:**
12V, 4Ah Milwaukee
-  **Cable diameter:**
0.8 - 3 mm
-  **Max Speed:**
492 ft/min
-  **Microduct diameter:**
3, 5, 7, 8 mm
-  **Pushing force:**
up to 6.7 lbf
-  **Weight incl. transport box:**
approx 14 lbs
-  **Max pressure:**
232 psi
-  **Air connection:**
Std 3/8" Cejn
-  **WxHxD (transport box)**
18.1 x 13.8 x 7.1 in

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

Product specifications and data are subject to change without notice.



Manufacturer:
Jetting AB

Product Name:
TRIGGAIR Hand Held Fiber Blowing Machine

Manufacturer Part Number:
TRIGGAIR-CAN



▶ Click here for more details on the TRIGGAIR Hand Held Fiber Blowing Machine

FIBER BLOWING MACHINE FOR CABLE 0.8-3 MM / MICRODUCT 3, 5, 7 AND 8 MM


- Electrically operated. Battery connected.
- Fiber security by mechanical clutch and adjustable clamping force.
- Forward and reverse.
- Drive wheel with rubber rings secure a good and soft grip.
- Digital display showing speed and distance.
- Max. speed: 492 ft/min.
- Max pushing force: 6.7 lbf.
- Approved up to 232 psi pressure.
- Cruise control.

STD CONFIGURATION

- Transport Case
- TriggAIR machine
- 110/230 Charger for 12 V battery
- 2 pcs 12 V lithium battery
- Cable Seal assortment:
 - 10 pcs 1.2 mm
 - 10 pcs 1.8 mm
 - 10 pcs 2.2 mm
 - 10 pcs 2.8 mm
- Original Jetting Duct cutter
- User manual
- Seal for duct clamp

ACCESSORIES FOR TRIGGAIR

- Reel arm for drum with fiber
- Foldable tripod
- Metal wheel for cable 2-3 mm
- Table bracket for safe installation on working table
- 3 mm duct adaptor
- 33 feet air hose
- Jetair compressor for FTTH

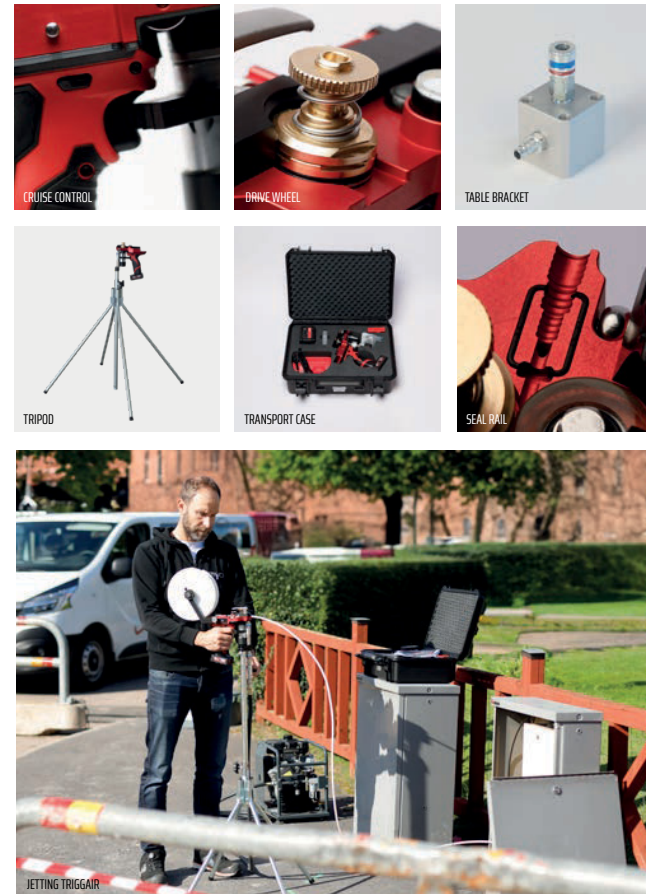

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

Product specifications and data are subject to change without notice.