



Learn More



**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
ÅngströmLap® Ultimas™-P New Final Polish Lapping Film Disc - 2 inch

**Manufacturer Part Number:**  
ULT026FH203N100

► Click here for more details on the ÅngströmLap® Ultimas™-P New Final Polish Lapping Film Disc - 2 inch

## PRODUCT SPECIFICATIONS:

### Description by Application

FO Type Name: 026Ultimas-PRO

Color: Natural

### Tape Specifications

Total Thickness:  $79.5 \pm 2.0 \mu\text{m}$

Surface Roughness:  $0.11 \pm 0.07 \mu\text{m}$

### Abrasive Type

Particle Type: Silicon dioxide

### Base Film Type

Base Film Material: Poly-ethylene terephthalate

Base Film Thickness: 3 mil (75  $\mu\text{m}$ )

### Process Parameters

Type: PRO



Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 1/5/2026.

[Learn More](#)

**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
ÅngströmLap® Ultimas™-P New Final Polish Lapping Film Disc - 2 inch

**Manufacturer Part Number:**  
ULT026FH203N100

► Click here for more details on the ÅngströmLap® Ultimas™-P New Final Polish Lapping Film Disc - 2 inch

## PRODUCT SPECIFICATIONS:

**Unit:** Standard packaging of 100

Roll - Product that has already been slit down for samples or to product specifications requested by the customer.  
This specification standard covers tapes for various applications.

Disc - Product that has been slit down into rolls then die cut into circular discs to conform to customer specified sizes.  
This specification standard covers discs for various applications

Sheet - Product that has been slit down into rolls then sheet cut into rectangular sheets to conform to customer specified sizes. This specification standard covers sheets for various applications

### Description:

Example: 026Ultimas-PRO

Abrasive Material	Process Type
026Ultimas	PRO
Silicon dioxide	Mixing Ratio Type

### Lot Description:

Indicated by 10 digits number.

Automatic numbering by enterprise resource planning system.

Example: 0000012345

### Product Specifications:

Mipox product standards are specified by the abrasive film Surface roughness and the total thickness diameter and length.

### Storage Environment:

- Temperature: 10 to 50 centigrade
- Humidity: 20 to 80%

**Product Life:** Mipox product life is guaranteed up to 5 years from the manufactured date

**Recommended Usage:** Usage amounts are conservative estimates and may vary based on individual conditions. Please contact Fiber Optic Center to optimize these usage numbers. Specifications subject to change without notice.



**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 1/5/2026.



Learn More




**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
ÅngströmLap® Ultimas™-P New Final Polish Lapping Film Disc - 2 inch

**Manufacturer Part Number:**  
ULT026FH203N100

► Click here for more details on the ÅngströmLap® Ultimas™-P New Final Polish Lapping Film Disc - 2 inch

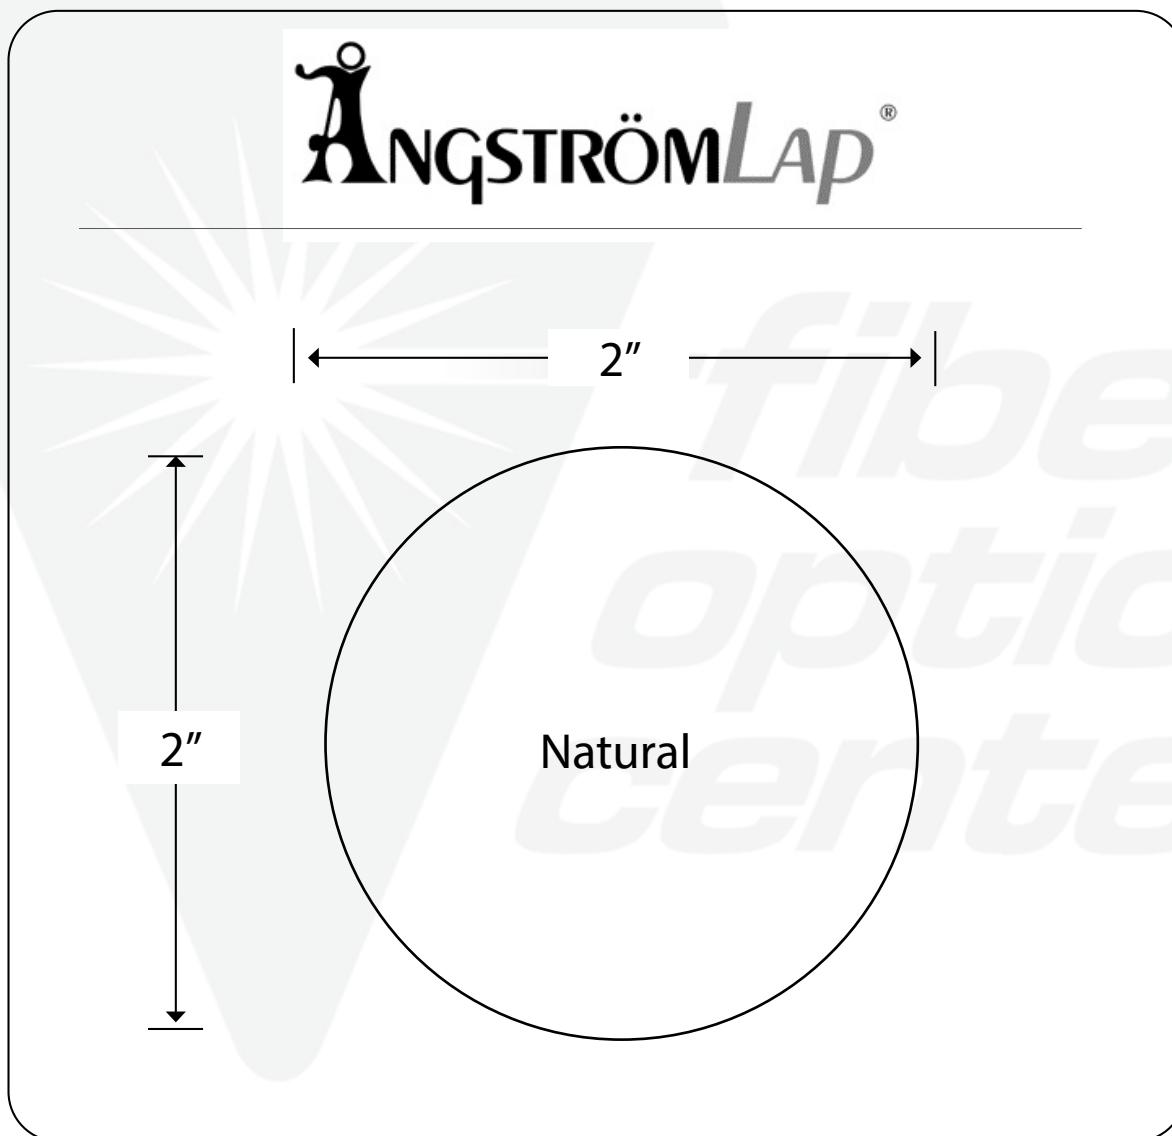

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 1/5/2026.