



Manufacturer:

Dymax

Product Name:


Dymax ACCU-CAL™ 160 UV Radiometer for Measuring UV Curing Flood Lamps and Conveyors

Manufacturer Part Number:

41590



▶ [Click here for more details on the Dymax ACCU-CAL™ 160 UV Radiometer for Measuring UV Curing Flood Lamps and Conveyors](#)

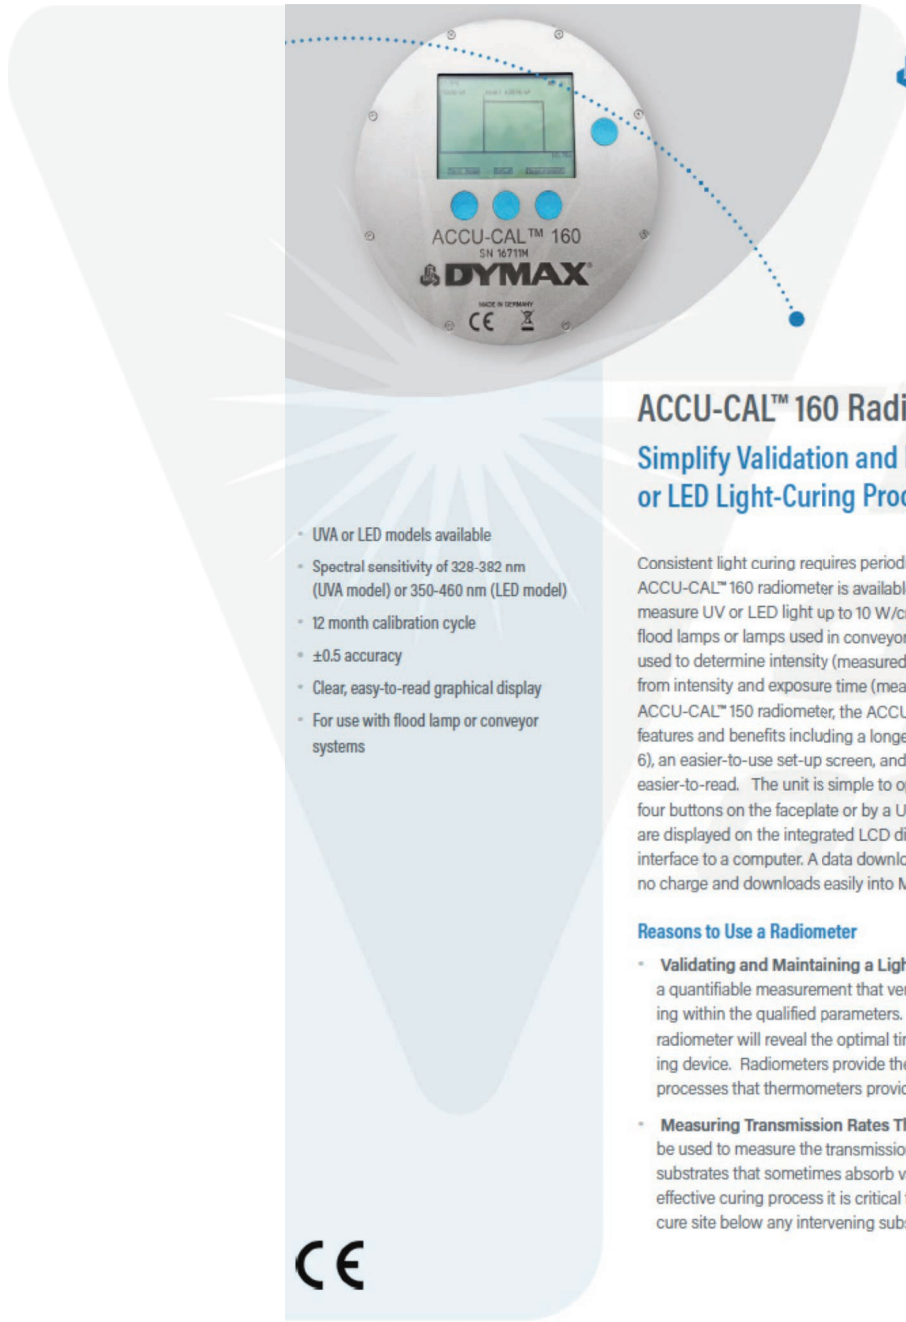

ACCU-CAL™ 160 Radiometers

Simplify Validation and Monitoring of Your UV or LED Light-Curing Process

- UVA or LED models available
- Spectral sensitivity of 328-382 nm (UVA model) or 350-460 nm (LED model)
- 12 month calibration cycle
- ±0.5 accuracy
- Clear, easy-to-read graphical display
- For use with flood lamp or conveyor systems

Consistent light curing requires periodic monitoring of light intensity or dose. The ACCU-CAL™ 160 radiometer is available in both a UV and LED model and can measure UV or LED light up to 10 W/cm² emitted from stationary light-curing flood lamps or lamps used in conveyORIZED processes. This radiometer can be used to determine intensity (measured in mW/cm²) or total energy as derived from intensity and exposure time (measured in mJ/cm²). When compared to the ACCU-CAL™ 150 radiometer, the ACCU-CAL™ 160 offers a number of improved features and benefits including a longer calibration cycle (12 months instead of 6), an easier-to-use set-up screen, and a graphical display that is clearer and easier-to-read. The unit is simple to operate and can be controlled manually via four buttons on the faceplate or by a USB remote interface. Measurement results are displayed on the integrated LCD display or transmitted by the USB remote interface to a computer. A data download kit is included with each radiometer at no charge and downloads easily into Microsoft Excel.

Reasons to Use a Radiometer

- **Validating and Maintaining a Light-Curing Process** – A radiometer provides a quantifiable measurement that verifies if the light-curing process is operating within the qualified parameters. Since all UV bulbs degrade over time, the radiometer will reveal the optimal time for bulb replacement in an UV light-curing device. Radiometers provide the same monitoring control for light-curing processes that thermometers provide for thermal processes.
- **Measuring Transmission Rates Through Substrates** – A radiometer can be used to measure the transmission rates of various wavelengths through substrates that sometimes absorb various frequencies of energy. To assure an effective curing process it is critical to measure the light intensity reaching the cure site below any intervening substrate.



PRODUCT BULLETIN | ACCU-CAL™ 160

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 5/11/2026.



Manufacturer:

Dymax

Product Name:

Dymax ACCU-CAL™ 160 UV Radiometer for Measuring UV Curing Flood Lamps and Conveyors

Manufacturer Part Number:

41590



▶ [Click here for more details on the Dymax ACCU-CAL™ 160 UV Radiometer for Measuring UV Curing Flood Lamps and Conveyors](#)

Specifications

Specifications	
Part Number	41590 ACCU-CAL™ 160 Radiometer - UVA 41585 ACCU-CAL™ 160 Radiometer - LED
Light Sources	UV or LED light-curing flood lamps and conveyor systems
Spectral Sensitivity	328 nm - 382 nm (UVA model) 350 nm - 460 nm (LED model)
Intensity Range	1.0 mW/cm ² to 10 W/cm ²
Accuracy	+/- 0.5%
Resolution	Intensity (1 mW/cm ²) Dose (1 mJ/cm ²)
Calibration Period	12 months
Operating Temperature Ranges	0-75°C internal temperature; tolerates high external temperatures for short periods (audible alarm indicates when temperature has exceeded tolerance)
Measurements	Peak intensity (mW/cm ²) Dose (mJ/cm ²)
Power Supply	Lithium polymer battery, 800 mAh, charged via USB interface (Mini-B), 5 VDC, 500 mA
Battery Life	10 hours (backlight on, no operation) or 6 hours (backlight on, full operation)

Radiometer Calibration

Dymax recommends calibrating the ACCU-CAL™ 160 radiometer every 12 months to ensure proper operation of the instrument.

©2020 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.
Please note that most light-curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale published on our website. Dymax recommends that any intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied.
PB050 7/5/2015

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 5/11/2026.