



**Manufacturer:**  
Micro Electronics

**Product Name:**  
Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

**Manufacturer Part Number:**  
MS-FOK-2



Learn More


► Click here for more details on the Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

Micro-Strip stripping tools from Micro-Electronics strip buffered fiber up to 2360µm, and jacketed fiber up to 3.5mm quickly and easily.

You can use two standard handles with interchangeable cutter blade sets, fiber guides and fiber guide locks to strip all sizes. Simply select and install the proper cutter blade sets, tube guides, and tube guide locks.

Or if you prefer, purchase Micro-Strip tools individually fitted for the fiber or jacket diameter you specify with cutter blade sets and fiber guides already installed.


## Micro-Strip® Tool Breakdown

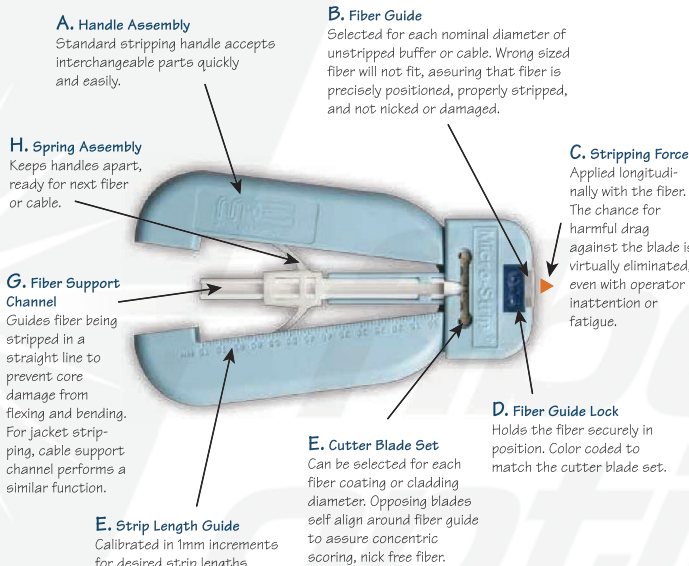


## Ultra-Precise Non-Thermal Stripping System

### SNAP-APART PRECISION-MACHINED BLADE HALVES MOLDED INTO THERMOPLASTIC BODIES

Patented, self-centering stripping system assures precise, concentric scoring with no cladding or core damage.



### PRECISION MACHINED FIBER GUIDE

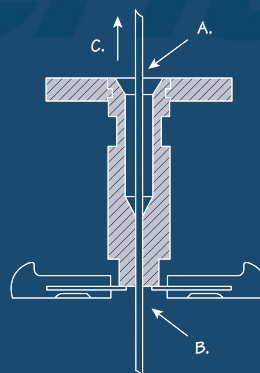

End of fiber guide supports blades during stripping to prevent blade flexing and fatigue.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.  
FOC last update 12/10/2025.



[Learn More](#)

**Manufacturer:**  
Micro Electronics

**Product Name:**  
Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

**Manufacturer Part Number:**  
MS-FOK-2

▶ [Click here for more details on the Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit](#)

## Non-Thermal Stripping Procedure

## PROPER TOOL SELECTION

Select the proper tool and components for either fiber stripping or jacket stripping by referring to the tables enclosed. If necessary, install proper fiber guide, fiber guide lock and cutter blade set.

### STRIPPING PROCEDURE (BUFFERED OPTICAL FIBER USING MS-1-FS TOOL)

1. Hold tool in one hand, fiber in the other. Keep handles in fully expanded position. Insert fiber through fiber guide until end lines up with markings to match desired strip length.

**2. Squeeze handles closed.**  
Cutter blades are now scoring the buffer or coating.

**3.** While maintaining a slight pressure to keep the stripper blades closed, withdraw fiber from tool, completing the stripping process.


### STRIPPING PROCEDURE (BUFFERED OPTICAL FIBER USING MS-2-L TOOL WITH LATCH BAR)

**1. Insert cable through fiber guide. Align end of cable with rule marking at desired strip length.**

2. Close handles together while blades cut into jacket while holding handles closed, flip latch bar down around pin. Release handles to latched, semi-open position. Do not reclose handles. Move hand up to grasp head of tool. While other hand is holding cable firmly, pull with a quick smooth motion. Flip latch off pin. Stripped jacket will fall out through rear of channel when handles are fully open.

**Note:** Never leave tool with latch in locked position. This can cause Delrin spring to take set, preventing handles from opening fully. When stripping hard, tough or thick jackets, it is NOT necessary to use latch bar. Lock bar out of the way by tightening the screw.

1. Insert correct fiber/wire through guide and into support channel to desired strip length.

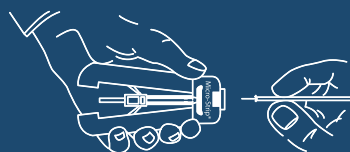

2. Close handles. Blade sets cut almost through the insulation without ever touching the fiber/wire.



3. With handles closed, pull fiber/wire or cable from tool. Always a precision strip length. Fiber/wire is never nicked or damaged.



## Ultra-Versatile

Use these two standard handles to strip buffered fiber up to 900µm, or jacketed fiber up to 3.5mm quickly and easily. Simply select and install the proper cutter blade sets, fiber guides and fiber guide locks. Or, if you prefer, purchase Micro-Strip® tools individually fitted for the fiber of jacket diameter you specify. Cutter blade sets and fiber guides come pre-installed.

MS-1-FS tool with interchangeable cutter blades and fiber guides can mechanically strip buffered fiber up to 2300 $\mu$ m.

**Cutter Blade Sets:** 18 sizes for 80um to 1350um fiber.

**Fiber Guides:** 20 sizes, for 180um to 2360um coatings.

**Fiber Guide Locks:** Provided with cutter blade sets.




## Coating / Buffer Stripping

MS-2-L tool with interchangeable cutter blades and fiber guides can mechanically strip jackets for 2.5mm, 3.0mm, and 3.5mm cable.

**Cutter Blade Sets:** One standard size 0.054' dia.

**Fiber Guides:** 3 sizes for 2.5mm, 3.0mm, and 3.5mm jackets.

**Fiber Guide Locks:** Provided with cutter blade sets.

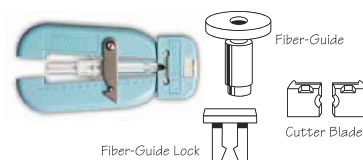

## Jacket Stripping

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are  
subject to change without notice.  
FOC last update 12/10/2025.



**Manufacturer:**  
Micro Electronics

**Product Name:**  
Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

**Manufacturer Part Number:**  
MS-FOK-2

Click here for more details on the Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

## Micro-Strip® Ordering Information

1. From table, identify coating or cladding diameter you wish to strip down to. Read across to Complete Tool Cat. No.

2. From Fiber Guide Selection table, identify desired coating or buffer diameter to learn Fiber Guide Cat. No. Put 2-digit code in Complete Tool Cat. No. space to complete it.

3. Order complete tool. Proper cutter blade set and fiber guide will be provided.

4. Order replacement cutter blade sets and fiber guides as needed.

1. From table, identify jacket diameter you wish to strip. Read across to Complete Tool Cat. No.

2. Order complete tool. Proper cutter blade set and jacket guide will be provided.

3. Order replacement cutter blade sets and jacket guides as needed.

| COMPLETE TOOLS AND REPLACEMENT BLADE SETS FOR OPTICAL FIBER |             |                   |                          |                                        |                  | FIBER GUIDE SELECTION                      |                                   |
|-------------------------------------------------------------|-------------|-------------------|--------------------------|----------------------------------------|------------------|--------------------------------------------|-----------------------------------|
| Fiber Cladding Diameter to Expose                           |             | Proper Blade Dia. | Complete Tool Cat. No. † | Replacement Cutter Blade Set Cat. No.* | Blade Color Code | Fiber Coating or Buffer Dia. (µm) to Strip | Replacement Fiber Guide Cat. No.▲ |
| (µm)                                                        | (in.)       |                   |                          |                                        |                  |                                            |                                   |
| up to 80                                                    | up to .0031 | .0045             | MS1-04S- <del>FS</del>   | MS1-RB-04S                             | CLEAR            | up to 180                                  | MS1-RT-07                         |
| 85-120                                                      | .0033-.0047 | .0055             | MS1-05S- <del>FS</del>   | MS1-RB-05S                             | LAVENDER         | 180-250                                    | MS1-RT-10                         |
| 125-135                                                     | .0049-.0053 | .0063             | MS1-06S- <del>FS</del>   | MS1-RB-06S                             | PURPLE           | 250-343                                    | MS1-RT-13                         |
| 125-175                                                     | .0049-.0068 | .008              | MS1-08S- <del>FS</del>   | MS1-RB-08S                             | RED              | 343-407                                    | MS1-RT-16                         |
| 180-230                                                     | .0070-.0090 | .010              | MS1-10S- <del>FS</del>   | MS1-RB-10S                             | LIGHT BLUE       | 407-457                                    | MS1-RT-18                         |
| 235-280                                                     | .0092-.0110 | .012              | MS1-12S- <del>FS</del>   | MS1-RB-12S                             | WHITE            | 457-533                                    | MS1-RT-21                         |
| 285-330                                                     | .0112-.0129 | .014              | MS1-14S- <del>FS</del>   | MS1-RB-14S                             | DARK GREEN       | 533-635                                    | MS1-RT-25                         |
| 335-380                                                     | .0131-.0149 | .016              | MS1-16S- <del>FS</del>   | MS1-RB-16S                             | ORANGE           | 635-787                                    | MS1-RT-31                         |
| 385-430                                                     | .0151-.0169 | .018              | MS1-18S- <del>FS</del>   | MS1-RB-18S                             | YELLOW           | 787-889                                    | MS1-RT-35                         |
| 435-500                                                     | .0171-.0196 | .021#             | MS1-21S- <del>FS</del>   | MS1-RB-21S                             | ROYAL BLUE       | 889-1016                                   | MS1-RT-40                         |
| 505-550                                                     | .0198-.0216 | .023              | MS1-23S- <del>FS</del>   | MS1-RB-23S                             | MAROON           | 1016-1168                                  | MS1-RT-46                         |
| 555-600                                                     | .0218-.0236 | .025              | MS1-25S- <del>FS</del>   | MS1-RB-25S                             | LIGHT GREEN      | 1168-1321                                  | MS1-RT-52                         |
| 605-680                                                     | .0238-.0267 | .028##            | MS1-28S- <del>FS</del>   | MS1-RB-28S                             | BLACK            | 1321-1397                                  | MS1-RT-55                         |
| 685-750                                                     | .0269-.0295 | .031              | MS1-31- <del>FS</del>    | MS1-RB-31S                             | TAN              | 1397-1600                                  | MS1-RT-63                         |
| 755-830                                                     | .0297-.0326 | .034              | MS1-34- <del>FS</del>    | MS1-RB-34S                             | PINK             | 1600-1702                                  | MS1-RT-67                         |
| 835-900                                                     | .0328-.0354 | .037              | MS1-37- <del>FS</del>    | MS1-RB-37S                             | GRAY             | 1702-1778                                  | MS1-RT-70                         |
| 905-1050                                                    | .0356-.0413 | .044              | MS1-44- <del>FS</del>    | MS1-RB-44S                             | DARK BROWN       | 1778-1930                                  | MS1-RT-76                         |
| 1055-1350                                                   | .0415-.0531 | .054              | MS1-54- <del>FS</del>    | MS1-RB-54S                             | NATURAL          | 1930-2057                                  | MS1-RT-81                         |
|                                                             |             |                   |                          |                                        |                  | 2057-2184                                  | MS1-RT-86                         |
|                                                             |             |                   |                          |                                        |                  | 2184-2362                                  | MS1-RT-93                         |

For best results use .0063 inch blade when removing 250µm coating.

For best results use .0090 inch blade when removing 400µm coating.

For best results use .0063 inch blade when removing 250µm coating.

For best results use .0080 inch blade when removing 900µm buffer.

# For best results when stripping secondary buffer down to primary 250µm coating use blade size .021.

## For best results when stripping secondary buffer down to primary 500µm coating use blade size .028.

† Includes tool individually boxed with cleaning tool, push tool and instructions.

\* Catalog numbers are for two cutter blade sets packaged together with a matching fiber guide lock.

Each blade set consists of a pair of joined, matched blades which must be snapped apart prior to use.

Matched cutter blade sets are NOT interchangeable, and must only be used with their matching half.

▲ Catalog numbers are for a single, individually packaged fiber guide with integral size indicator disk.

| COMPLETE TOOLS AND REPLACEMENT BLADE SETS FOR JACKET STRIPPING |            |                           |                                        |                  | REPLACEMENT HANDLE ASSEMBLY |             |                                             |
|----------------------------------------------------------------|------------|---------------------------|----------------------------------------|------------------|-----------------------------|-------------|---------------------------------------------|
| Jacket Diameter                                                | Blade dia. | Complete Tool Cat. No. †† | Replacement Cutter Blade Set Cat. No.* | Blade Color Code | Handle Assembly*            | Application |                                             |
| (µm)                                                           | (in.)      |                           |                                        |                  |                             |             |                                             |
| 2.5                                                            | .098       | .054                      | MS2-54S-D1                             | MS2-RB-54S       | NATURAL                     | MS-1-FS     | Fiber coating/buffer stripping up to 2360µm |
| 3.0                                                            | .118       | .054                      | MS2-54S-D2                             | MS2-RB-54S       | NATURAL                     |             |                                             |
| 3.5                                                            | .137       | .054                      | MS2-54S-D3                             | MS2-RB-54S       | NATURAL                     | MS-2-L      | Jacket stripping up to 3.5mm                |

MS-1 and MS-2 components are not interchangeable.

\* Catalog are for two cutter blade sets packaged together with a matching fiber guide lock

Each blade set consists of a pair of joined, matched blades which must be snapped apart prior to use.

Matched cutter blade sets are NOT interchangeable, and must only be used with their matching half.

† Includes tool individually boxed with cleaning brush, push tool and instructions.

†† Catalog numbers are for single individually packaged Jacket Guide (with integral size indicator disk).

\* Includes handle individually boxed with cleaning brush, push tool and instructions. Cutter blade set and fiber guide are NOT included.

### OPTICAL FIBER TERMINOLOGY

Optical Fiber, made of glass, fused silica, or plastic transmits light much as metallic wire carries electricity. Optical fibers are encased in various ways to meet application requirements. Shown here are the typical components of optical fiber:

**BUFFER** - Material that protects an optical fiber from physical damage.


**COATING** - Material in intimate contact with the cladding surface, applied to preserve its integrity.

**CLADDING** - The dielectric material surrounding an optical fiber's core.

**CORE** - The central region of an optical fiber through which light is transmitted.

**MULTIPLE-FIBER RIBBON** - A formed, flat carrier of several optical fibers.

**OPTICAL CABLE** - A fiber, multiple fibers, or fiber bundle in a structure fabricated to meet optical, mechanical, and environmental specifications.

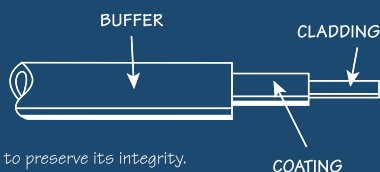

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.



**Manufacturer:**  
Micro Electronics

**Product Name:**  
Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

**Manufacturer Part Number:**  
MS-FOK-2



Learn More

► Click here for more details on the Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

## Micro-Strip® /Soft-Strip® Cutter Blade Replacement

### TO REMOVE INSTALLED BLADES:

1. Using flat end of push tool, remove fiber guide lock by pushing out from the back side of tool head.
2. Remove Fiber guide from tool.
3. Using prong end of push tool in small holes on back side of tool head, eject blade set.


### IMPORTANT!

*Do not remove cutter blades while fiber guide is still in tool.*

### TO INSTALL NEW BLADES:

(Furnished in a matched set for blade precision. Snap apart before installation.)

1. Install with "ears" pointing toward top of tool and recess marks visible. Push firmly with flat end of push tool until both blades are seated.
2. Insert fiber guide through hole in top of tool until it stops.
3. Insert fiber guide lock through slot in front of tool head.

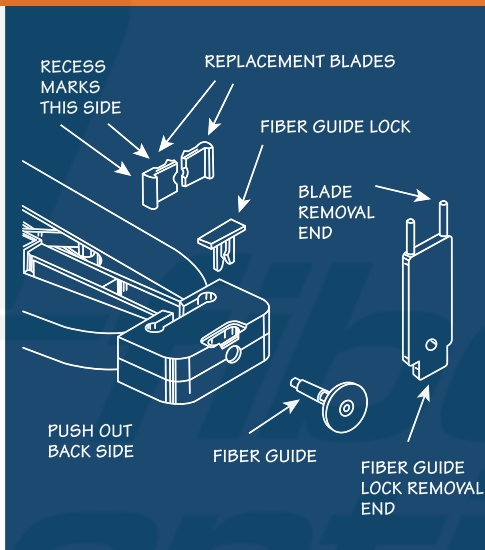

**Note:** Blades are color coded and matched to diameter and color of fiber guide lock. Replace or install fiber guide and fiber guide lock as needed. Always test strip fiber after installing new blade set. Remove blades periodically and clean with brush provided and alcohol.

## The Best Non-Thermal / Thermal Stripping Tools

### Accuracy

Every stripping component of the Micro-Strip® system is manufactured to tolerances tighter than 0.0005".

### Error Proof

Because Micro-Strip®'s components are color coded, there's no chance for error, and virtually no chance of fiber damage. Every detail of Micro-Strip®'s design has been tested, retested, and proven in the field since 1973.

### The Right Tool

You can order a variety of standard Micro-Strip® tools already fitted with your desired fiber guide and cutter blade set. You can also order replacement blade sets and guides so the same handle can be used to strip many sizes of fiber or cable.



### Tool Kits

Convenient Micro-Strip® and Soft-Strip® kits include the most used components for fiber optic stripping, along with complete instructions, cleaning brush and component tool.

### Versatility

There's no need to purchase separate tools for each fiber size. Micro-Strip®'s modular blade sets are quickly interchangeable and replaceable for coated optical fibers up to 2300µm, or jacketed fibers up to 3.5mm.

### Low Stripping Force

Lower stripping force means less stress on the fiber and higher quality splices.

Micro-Strip® requires less than a pound of peak force for stripping coated fiber.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*



**Manufacturer:**  
Micro Electronics

**Product Name:**  
Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

**Manufacturer Part Number:**  
MS-FOK-2



[Learn More](#)

▶ [Click here for more details on the Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit](#)

## Micro-Strip® Kit Information

### Fiber Optic and A.W.G. Wire Stripping Starter Kits



#### Fiber Optic Stripping Kit

This fiber optic stripping kit, **MS-FOK-1**, contains stripping tool, blade and fiber guide components for both outer jacket stripping (up to 3.5mm) and coating/buffer stripping (up to 900µm). It comes packaged in an attractive metal case.



#### Fiber Optic Stripping Kit

This convenient three-step fiber optic stripping kit, **MS-FOK-2**, contains Kevlar scissors and prefitted strippers for outer jackets (up to 3.5mm), 900µm buffers and 250µm coatings.



#### A.W.G. Wire Stripping Kit

This A.W.G. wire stripping kit, **MS-TK-1**, is used for precision stripping of 18-32 gage fine wire. It contains a standard stripping handle with a variety of blade and guide components for stripping a wide range of solid or stranded wire.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*



**Manufacturer:**  
Micro Electronics

**Product Name:**  
Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

**Manufacturer Part Number:**  
MS-FOK-2



Learn More

▶ Click here for more details on the Micro Electronics Micro-Strip® MS-FOK-2 Mechanical Fiber Stripper Kit

#### Manufacturer Part Number:

|                 |                 |                 |                 |                 |                 |               |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|---------------|
| MS-FOK-2        | MS-4T-16S-21-FS | MS1-16S-67-FS   | MS1-31S-55-FS   | MS1-28S-40-FS   | MS1-05S-10-FS   | MS1-RB-04S    |
| MS-FOK-1        | MS1-23S-76-FS   | MS1-16S-70-FS   | MS-4T-12S-13-FS | MS1-31S-46-FS   | MS1-05S-21-FS   | MS1-RT-35     |
| MS1-08S-40-FS   | MS1-25S-63-FS   | MS-4T-12S-25-FS | MS1-28S-76-FS   | MS1-31S-52-FS   | MS1-05S-07-FS   | MS1-RB-37S    |
| MS1-06S-10-FS   | MS1-54S-67-FS   | MS1-23S-81-FS   | MS1-37S-86-FS   | MS1-31S-40-FS   | MS-4T-05S-18-FS | MS1-RB-54S    |
| MS1-10S-13-FS   | MS-4T-08S-35-FS | MS1-25S-52-FS   | MS1-37S-93-FS   | MS1-34S-46-FS   | MS-4T-06S-07-FS | MS-RHM-1      |
| MS1-08S-52-FS   | MS-4T-08S-31-FS | MS1-14S-63-FS   | MS1-44S-46-FS   | MS1-34S-52-FS   | MS1-05S-46-FS   | MS1-RT-40     |
| MS1-08S-55-FS   | MS-4T-05S-10-FS | MS1-14S-67-FS   | MS-4T-10S-31-FS | MS1-18S-35-FS   | MS1-21S-81-FS   | MS-4T-E       |
| MS1-10S-25-FS   | MS1-34S-93-FS   | MS1-16S-18-FS   | MS1-28S-86-FS   | MS1-18S-25-FS   | MS-4T-16S-25-FS | MS1-RT-67     |
| MS1-10S-31-FS   | MS1-37S-55-FS   | MS1-16S-21-FS   | MS1-28S-93-FS   | MS1-34S-40-FS   | MS-4T-16S-31-FS | MS-T3         |
| MS1-10S-35-FS   | MS1-54S-86-FS   | MS1-14S-16-FS   | MS1-31S-35-FS   | MS1-21S-25-FS   | MS-4T-16S-35-FS | MS-RHM-2      |
| MS1-10S-46-FS   | MS-4T-06S-16-FS | MS1-14S-35-FS   | MS-4T-10S-16-FS | MS1-21S-40-FS   | MS1-06S-07-FS   | MS1-RT-46     |
| MS1-10S-52-FS   | MS1-16S-46-FS   | MS1-14S-46-FS   | MS-4T-25S-31-FS | MS1-25S-46-FS   | MS-3T-06-G6     | MS1-RT-52     |
| MS1-10S-55-FS   | MS1-16S-52-FS   | MS1-14S-52-FS   | MS-4T-28S-31-FS | MS1-25S-31-FS   | MS-3T-06-G8     | MS1-RT-55     |
| MS-4T-12S-35-FS | MS1-31S-93-FS   | MS1-25S-67-FS   | MS-4T-28S-35-FS | MS1-44S-93-FS   | MS-3T-06-G10    | MS1-RT-63     |
| MS1-28S-63-FS   | MS1-34S-63-FS   | MS1-25S-70-FS   | MS-4T-06S-10-FS | MS-SK-2         | MS-3T-06-G5     | MS1-RT-93     |
| MS1-28S-67-FS   | MS1-34S-81-FS   | MS1-12S-55-FS   | MS-4T-08S-13-FS | MS1-14S-40-FS   | MS-4T-06S-13-FS | MS1-RT-65     |
| MS1-12S-16-FS   | MS-4T-08S-16-FS | MS1-12S-46-FS   | MS-4T-10S-18-FS | MS1-16S-25-FS   | MS-SK-1         | MS1-RT-81     |
| MS1-12S-25-FS   | MS-4T-08S-18-FS | MS1-54S-93-FS   | MS-4T-10S-21-FS | MS1-16S-31-FS   | MS-3T-06-G2     | MS-BL         |
| MS1-12S-31-FS   | MS-4T-08S-21-FS | MS-4T-12S-18-FS | MS-4T-05S-07-FS | MS1-18S-31-FS   | MS1-RB-14S      | MS2-RT-D2     |
| MS1-18S-40-FS   | MS1-28S-70-FS   | MS1-23S-86-FS   | MS-4T-05S-13-FS | MS1-23S-46-FS   | MS2-54S-D1      | MS1-RT-18     |
| MS1-18S-46-FS   | MS1-28S-81-FS   | MS1-23S-63-FS   | MS-4T-05S-16-FS | MS1-23S-25-FS   | MS2-54S-D2      | MS1-RT-07     |
| MS1-18S-52-FS   | MS1-31S-63-FS   | MS1-23S-67-FS   | MS-4T-25S-35-FS | MS1-23S-31-FS   | MS1-21S-31-FS   | MS1-RT-13     |
| MS-4T-14S-16-FS | MS1-25S-76-FS   | MS1-37S-46-FS   | MS-4T-08S-10-FS | MS1-08S-13-FS   | MS1-21S-46-FS   | MS-2-L        |
| MS-4T-14S-18-FS | MS1-21S-76-FS   | MS1-54S-70-FS   | MS-4T-14S-31-FS | MS1-08S-18-FS   | MS1-RB-34S      | MS3-RT-G2     |
| MS-4T-14S-25-FS | MS1-21S-52-FS   | MS1-54S-76-FS   | MS-4T-21S-25-FS | MS1-08S-10-FS   | MS1-RB-31S      | MS1-RB-21S    |
| MS-4T-21S-31-FS | MS1-28S-55-FS   | MS1-54S-81-FS   | MS-4T-14S-21-FS | MS1-10S-16-FS   | MS1-RB-08S      | MS3-RT-G10    |
| MS-4T-21S-35-FS | MS1-18S-21-FS   | MS1-34S-55-FS   | MS1-06S-46-FS   | MS1-12S-18-FS   | MS-TK-1         | MS1-RB-05S    |
| MS-4T-18S-21-FS | MS1-18S-55-FS   | MS1-18S-70-FS   | MS1-05S-18-FS   | MS1-12S-21-FS   | MS-4B-E         | MS1-RB-12S    |
| MS-4T-18S-25-FS | MS1-16S-55-FS   | MS1-21S-35-FS   | MS1-05S-13-FS   | MS1-12S-35-FS   | MS1-RT-16       | MS1-RT-10     |
| MS-4T-18S-35-FS | MS1-12S-63-FS   | MS1-18S-76-FS   | MS1-05S-16-FS   | MS1-14S-18-FS   | MS1-RT-31       | MS1-08S-35-FS |
| MS1-10S-21-FS   | MS1-14S-55-FS   | MS1-21S-55-FS   | MS1-06S-25-FS   | MS1-14S-21-FS   | MS1-RB-16S      | MS1-18S-67-FS |
| MS-4T-31S-35-FS | MS1-12S-52-FS   | MS1-21S-63-FS   | MS1-05S-25-FS   | MS1-14S-25-FS   | MS-4T-08S-40-FS | MS1-23S-70-FS |
| MS-4T-16S-18-FS | MS1-12S-40-FS   | MS1-21S-67-FS   | MS1-05S-31-FS   | MS1-14S-31-FS   | MS2-RT-D1       | MS1-25S-35-FS |
| MS-4T-23S-25-FS | MS1-10S-40-FS   | MS1-21S-70-FS   | MS1-05S-35-FS   | MS1-54S-63-FS   | MS1-RB-10S      | MS1-25S-55-FS |
| MS-4T-23S-35-FS | MS1-12S-13-FS   | MS1-37S-40-FS   | MS1-06S-21-FS   | MS1-06S-13-FS   | MS1-RB-06S      | MS1-31S-67-FS |
| MS-4T-06S-25-FS | MS1-08S-46-FS   | MS1-44S-67-FS   | MS1-08S-25-FS   | MS1-06S-40-FS   | MS1-RB-18S      | MS1-37S-70-FS |
| MS-4T-06S-31-FS | MS1-10S-18-FS   | MS1-44S-70-FS   | MS1-08S-31-FS   | MS1-37S-52-FS   | MS1-RB-44S      | MS1-23S-52-FS |
| MS-4T-10S-13-FS | MS1-16S-35-FS   | MS1-44S-76-FS   | MS1-08S-21-FS   | MS1-44S-52-FS   | MS1-RB-23S      | MS1-RT-25     |
| MS-4T-10S-25-FS | MS1-06S-18-FS   | MS1-34S-86-FS   | MS-4T-06S-18-FS | MS1-44S-63-FS   | MS1-RB-25S      | MS1-RT-70     |
| MS-4T-10S-35-FS | MS1-06S-31-FS   | MS1-34S-67-FS   | MS1-06S-35-FS   | MS1-44S-86-FS   | MS1-RB-28S      | MS1-RT-76     |
| MS-4T-18S-31-FS | MS1-06S-52-FS   | MS1-34S-70-FS   | MS1-18S-63-FS   | MS-4T-05S-21-FS | MS-3T-E         | MS1-RT-86     |
| MS-4T-06S-35-FS | MS1-16S-40-FS   | MS1-34S-76-FS   | MS1-08S-16-FS   | MS-4T-05S-25-FS | MS-1-FS         | MS2-06/2-G20  |
| MS-4T-08S-25-FS | MS1-06S-16-FS   | MS1-37S-76-FS   | MS1-23S-55-FS   | MS-4T-05S-31-FS | MS1-RB-65S      | MS2-06/2-G21  |
| MS-4T-23S-31-FS | MS1-25S-93-FS   | MS1-37S-63-FS   | MS-4T-05S-35-FS | MS1-05S-52-FS   | MS3-RT-G6       | MS3-RB-06     |
| MS-4T-12S-16-FS | MS1-25S-81-FS   | MS1-37S-67-FS   | MS1-23S-35-FS   | MS-4T-21S-81-FS | MS3-RT-G8       | MS3-RB-06/2   |
| MS-4T-12S-21-FS | MS1-25S-86-FS   | MS1-31S-70-FS   | MS1-23S-40-FS   | MS1-37S-81-FS   | MS3-RT-G5       | MS3-RT-G20    |
| MS-4T-12S-31-FS | MS1-28S-35-FS   | MS1-31S-76-FS   | MS1-25S-40-FS   | MS1-44S-55-FS   | MS-CB-1         | MS3-RT-G21    |
| MS-4T-14S-35-FS | MS1-28S-52-FS   | MS1-31S-81-FS   | MS1-28S-46-FS   | MS1-44S-81-FS   | MS2-RT-D3       |               |
| MS-4T-06S-21-FS | MS1-16S-63-FS   | MS1-31S-86-FS   | MS1-28S-31-FS   | MS1-05S-40-FS   | MS2-RB-54S      |               |

Contact the professionals at Fiber Optic Center for a quote or to get more details.

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are  
subject to change without notice.