



Manufacturer:
Techcon™

Product Name:
Techcon TS250 Epoxy Dispensing Machine

Manufacturer Part Number:
TS250

[Learn More](#)

▶ [Click here for more details on the Techcon TS250 Epoxy Dispensing Machine](#)



TS250 Series Dispenser

Entry-Level Digital Dispenser

The TS250 Series Dispenser dispenses low, medium and high viscosity fluids, accurately and consistently.

These systems are economical, highly accurate and repeatable micro air dispensing systems.

These user friendly dispensing systems include a digital timer, with rotary timing knob, for easy setup and a vacuum control for all viscosities of fluid.

The rear DB9 interface connector has the ability to initiate the dispense cycle by an external device by way of voltage or contact closure signal.

Available in two versions of operating pressure: 0 to 100 psi (0 to 6.9bar) for general applications and 0 to 15 psi (0 to 1.0bar) for specific low viscosity applications.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.
FOC last update 12/10/2025




Manufacturer:
Techcon™

Product Name:
Techcon TS250 Epoxy Dispensing Machine

Manufacturer Part Number:
TS250

▶ [Click here for more details on the Techcon TS250 Epoxy Dispensing Machine](#)

FEATURES

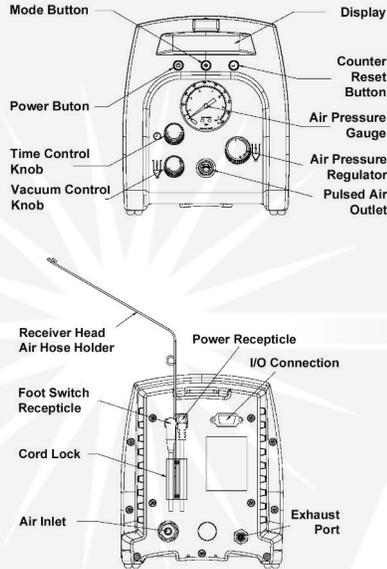

Key Features & Benefits

- Universal power supply for worldwide use
- 16 x 2 LCD display with back lighting
- Digital timing from 0.020 – 60 seconds
- Adjustable vacuum suck back to control fluid tailing and waste

Typical Applications

Dispense:

- Solder paste dots on PCBA
- UV adhesive in medical device manufacturing
- Beads of grease for lubrication purposes

SPECIFICATIONS & PART NUMBERS

Part Number:	TS250
Size (Imperial):	6" W x 7.7" L x 7.2" H
Size (Metric):	152mm x 195mm x 183mm
Weight:	2.6 lb (1200g)
Pressure Range:	0 to 100psi (0 to 6.9bar)
Cycle Rate:	600/min.
Timing Range:	0.020 – 60 seconds
Timing Tolerance:	+/- 0.001%
Input Voltage:	100 – 240 VAC
Input Frequency:	50 – 60 Hz
Cycle Modes:	Timed, Purge
Certification:	CE, TUV-GS and NRTL

The valve is shipped with the following items:

- Power Supply • Foot Switch • Air Hose • Sample Dispense Tips
- 10cc Receiver Head • 10cc Svrinae. Piston & Tip Cap • Svrinae

ACCESSORIES

- Syringe Barrels: The dispenser can be connected to any size and color Techcon syringe barrel.
- Receiver Heads: Receiver heads connect the dispenser to syringe barrel. Available in 3ft (0.9m) or 6ft (1.8m) air hose lengths.
- Dispense Tips: All Techcon dispense tips can be use with the TS250 Series.

171005-1200-CL

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 12/10/2025