

**Manufacturer:**

AFL

Product Name:AFL FASTConnect® ST® Connector, 50µm (micron)
Laser-Optimized OM3 Multimode Fiber, 900µm Black Boot - 6 Pack**Manufacturer Part Number:**

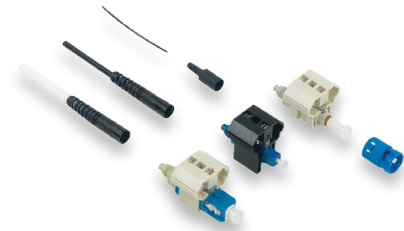
FASTSTMM50L6

[Learn More](#)[Click here for more details on the AFL FASTConnect® ST® Connector, 50µm \(micron\) Laser-Optimized OM3 Multimode Fiber, 900µm Black Boot - 6 Pack](#)

FASTConnect® Field-Installable Connectors

FASTConnect are factory pre-polished, field-installable connectors that completely eliminate the need for hand polishing in the field. Proven mechanical splice technology ensuring precision fiber alignment, a factory pre-cleaved fiber stub and a proprietary index-matching gel combine to offer an immediate low loss termination to either single-mode or multimode optical fibers. FASTConnect are compatible with 250 µm and 900 µm optical fibers, as well as 4.8 mm (SC only) cordage.

All primary fiber types are supported, and each connector is color coded per industry standard requirements to aide in identification during and after installation. A factory-installed wedge clip (included with each connector) is removed and discarded upon completion of the termination. Incorporated into this device is an innovative, translucent wedge enabling the use of a common VFI to provide a "pass/fail" signal once physical contact is achieved.

**Features**

- No epoxy, no Polish
- Low insertion loss
- Fiber can be reinserted up to three times
- 4.8 mm (SC only) cordage compatibility
- VFI accessory to confirm proper installation

Applications

- Premise/Enterprise Networks
- LAN/WAN Connections
- Patch Panels
- Equipment Termination
- FTTx Applications
- Field Repair/Replacement
- Equipment Test Leads

Specifications


Parameter	Type	Value
Insertion Loss:	Single-mode - UPC	Average: 0.2 dB, Maximum: 0.5 dB
	Single-mode - APC	Average: 0.3 dB, Maximum: 0.6 dB
	Multimode - PC	Average: 0.1 dB, Maximum: 0.5 dB
Return Loss at Room Temperature	Single-mode - UPC	Average: -50 dB, Maximum: -45 dB
	Single-mode - APC	Average: -55 dB, Maximum: -50 dB
	Multimode	Average: -25 dB, Maximum: -20 dB

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.

**Manufacturer:**

AFL

Product Name:AFL FASTConnect® ST® Connector, 50µm (micron)
Laser-Optimized OM3 Multimode Fiber, 900µm Black Boot - 6 Pack**Manufacturer Part Number:**

FASTSTMM50L6

[Learn More](#)[Click here for more details on the AFL FASTConnect® ST® Connector, 50µm \(micron\) Laser-Optimized OM3 Multimode Fiber, 900µm Black Boot - 6 Pack](#)

FASTConnect® Field-Installable Connectors

Ordering Information

Fiber Type	Housing Color	Cable Size	AFL No.	
			Package of 6	Package of 100
FASTConnect SC				
Multimode 62.5/125 µm, OM1	Beige	900 µm	FAST-SC-MM62.5-6	FAST-SC-MM62.5-100
Multimode 50 µm LOMMF*	Aqua	900 µm	FAST-SC-MM50L-6	FAST-SC-MM50L-100
Single-mode, UPC	Blue	900 µm	FAST-SC-SM-6	FAST-SC-SM-100
Single-mode, APC	Green	900 µm	FAST-SC-SMAU-6	FAST-SC-SMAU-100
FASTConnect ST				
Multimode 62.5/125 µm, OM1	Beige	900 µm	FAST-ST-MM62.5-6	FAST-ST-MM62.5-100
Multimode 50 µm LOMMF*	Aqua	900 µm	FAST-ST-MM50L-6	FAST-ST-MM50L-100
Single-mode, UPC	Blue	900 µm	FAST-ST-SM-6	FAST-ST-SM-100
FASTConnect LC				
Multimode 62.5/125 µm, OM1	Beige	900 µm	FAST-LC-MM62.5-6	FAST-LC-MM62.5-100
Multimode 50 µm LOMMF*	Aqua	900 µm	FAST-LC-MM50L-6	FAST-LC-MM50L-100
Single-mode, UPC	Blue	900 µm	FAST-LC-SM-6	FAST-LC-SM-100
Single-mode, APC	Green	900 µm	FAST-LC-SMAU-6	

* Laser Optimised MM Fiber (LOMMF) Compatible with OM2, OM3 and OM4 fibers.

Accessories

Tool Kits	AFL NO.
FASTConnect High Precision Tool Kit with CT50 Cleaver	CS001201
Visual Fault Identifiers	AFL NO.
VFI4 visual fault identifier with 2.5 mm and 1.25 mm adapters	VFI4-01-0900PR

Qualifications

Governing Body	Standard Code
EIA/TIA	568-C.3 604 (FOCIS)

Patents

Country	Patent Number(s)
U.S.	5,963,699 5,984,532 6,179,482 7,003,208 7,258,496

Temperature Specifications

Temperature Range	
Operating Temperature	-40°C to +75°C

Contact the professionals at Fiber Optic Center for a quote or to get more details.focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are
subject to change without notice.