



Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03

[Learn More](#)

▶ [Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode \(BIMM\) Fiber RI & Geometry Measurement](#)



Measure fibers up to 600 μm

nPA-600

Refractive Index Profiler

The nPA-600 Refractive Index Profiler uses a modified refracted near-field technique to analyse a fiber end-face to determine the full 2D refractive index distribution.

The nPA-600 is the quick and easy way to get the Refractive Index data you need to verify your specialty fiber design and manufacturing processes. The nPA-600 comes with the nPA v4.0 software which improves measurement speed, enhances user experience, and enables greater measurement customisation possibilities. Its API allows the nPA-600 to integrate to users' systems seamlessly.

Optional software plug-ins enable new functionalities such as measuring the geometry of single-mode fibers, PM fibers, multi-core fibers and various parameters of bend-insensitive multimode (BIMM) fibers.



Measure fibers up to 600 μm



Measure refractive index profiles in seconds



Measure most standard and specialty fibers



Production ready software with optional plug-ins to enable new features

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.



Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement


Manufacturer Part Number:
NPA-SPI03



▶ Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Features & Benefits

- Measure fibers up to 600 μm in diameter
- Prepare and measure a fiber sample in under 2 minutes (2D measurement in seconds)
- Measure circularly symmetric fibers and non-circularly symmetric fibers – good for PM, octagonal, multi-core fibers
- Preinstalled with production-ready nPA v4.0 software
 - User Experience enhancement: Various measurement options (refractive index scales, measurement areas) and output options (e.g. PDF measurement reports)
 - Faster measurement of smaller fibers
 - Customisable measurement template for easy comparison vs target values
 - API facilitates users customisation and integration with other systems
 - Optional software plug-ins enabling new functionalities
 - In-field traceable re-calibration enabled by the new calibration tool and the new optional calibration fiber certified by the National Physical Laboratory (NPL) and Arden, without having to send the instrument to Arden service centres.

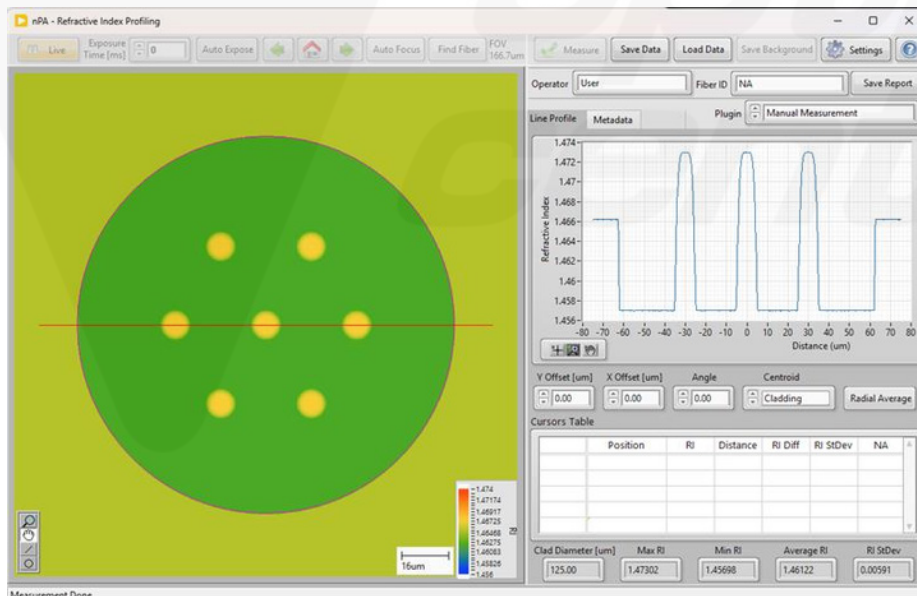


The nPA-600 with nPA 4.0 software measures fibers (multi-core fibers) up to 600 μm in diameter with customised measurement points and regions.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.

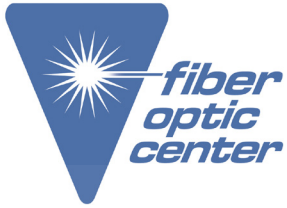

Manufacturer:
Arden Photonics



Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03





▶ [Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode \(BIMM\) Fiber RI & Geometry Measurement](#)



The nPA-600 measures most specialty fibers, such as

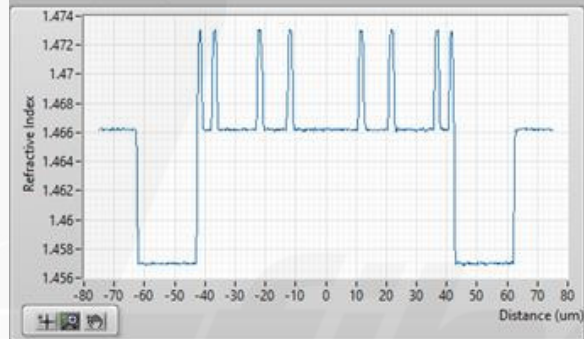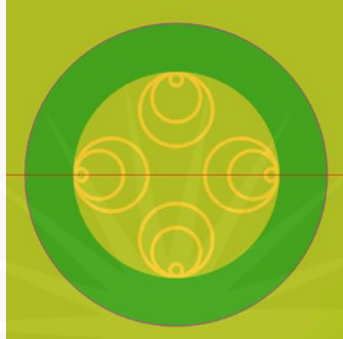

Nested Antiresonant Nodeless Fiber (NANF)

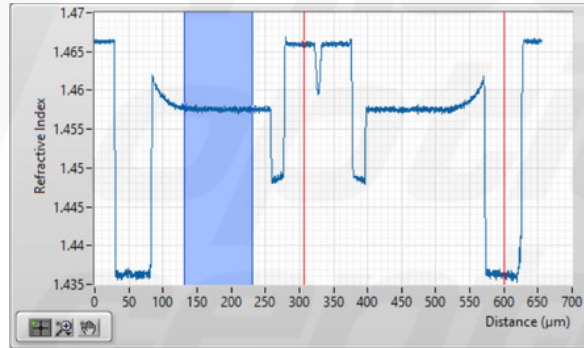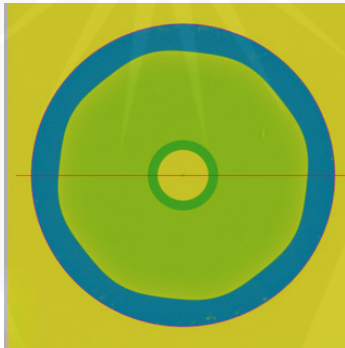

Octagonal fiber - for fiber laser applications

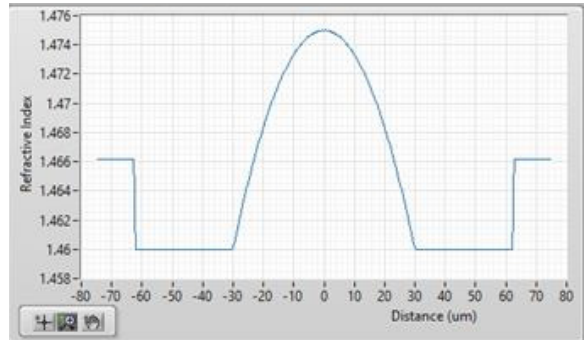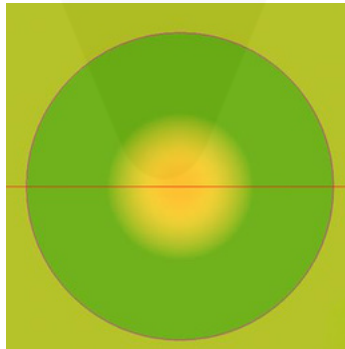

Graded index multimode fiber

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.



Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03


Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Optional Software Plug-ins (Available from nPA 3.0 software onwards)

The optional plug-ins further extend the functionalities of nPA-600. Three optional plug-ins are available for measuring the RI & geometry of specialty fibers.

- nPA-SPI01 : measures the RI & geometry of Panda-style PM fibers, with cladding diameters 80 - 400 μm .
- nPA-SPI02 : measures the RI & geometry of single-mode fibers, with cladding diameter 80 - 400 μm .
- nPA-SPI03: measures the RI & geometry of BIMM fibers, with cladding diameter 125 μm .
- nPA-SPI04: measures the RI & geometry of Multicore Fiber, with cladding diameter 40 - 600 μm


PM fiber measurement using SPI-01 plug-in

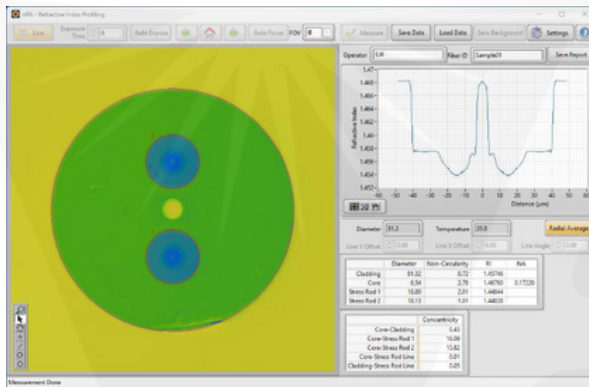

Measured values:

- Cladding – diameter, non-circularity, average refractive index
- Core – diameter, non-circularity, average refractive index
- Stress Rods – diameter, non-circularity, average refractive index
- Concentricity – core-clad, core-stress rod
- Stress Rod Line offset to core and cladding

Single mode fiber measured using SPI-02 plug-in

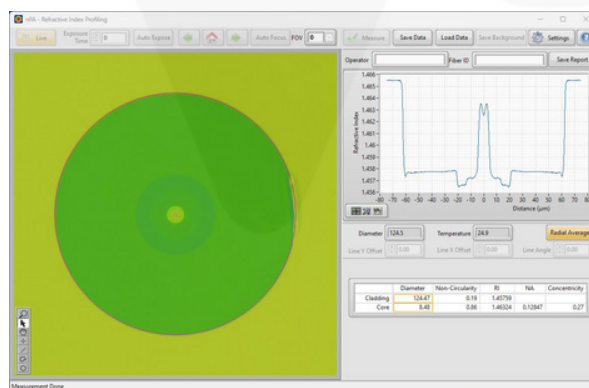

Measured values:

- Cladding – diameter, non-circularity, average refractive index
- Core – diameter, non-circularity, average refractive index
- Core-Clad Concentricity

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.



Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03


▶ [Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode \(BIMM\) Fiber RI & Geometry Measurement](#)

Optional Software Plug-ins (Available from nPA 3.0 software onwards)

The optional plug-ins further extend the functionalities of nPA-600. Three optional plug-ins are available for measuring the RI & geometry of specialty fibers.

- nPA-SPI01 : measures the RI & geometry of Panda-style PM fibers, with cladding diameters 80 - 400 μm .
- nPA-SPI02 : measures the RI & geometry of single-mode fibers, with cladding diameter 80 - 400 μm .
- nPA-SPI03: measures the RI & geometry of BIMM fibers, with cladding diameter 125 μm .
- nPA-SPI04: measures the RI & geometry of Multicore Fiber, with cladding diameter 40 - 600 μm


BIMM fiber measured using SPI-03 plug-in

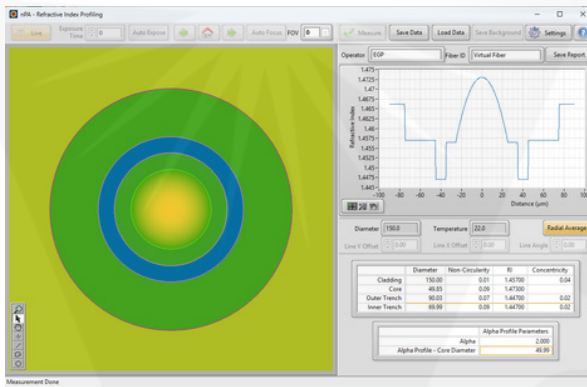

Measured values:

- Cladding – diameter, non-circularity, average RI
- Core – diameter, non-circularity, peak RI used for alpha estimations
- Alpha index profile parameters: alpha, theoretical core diameter.
- Core-Clad Concentricity
- Trench – Inner and Outer Diameter, non-circularity, average RI
- Trench-Core Concentricity

Multi-core fiber measured using SPI-04 plug-in

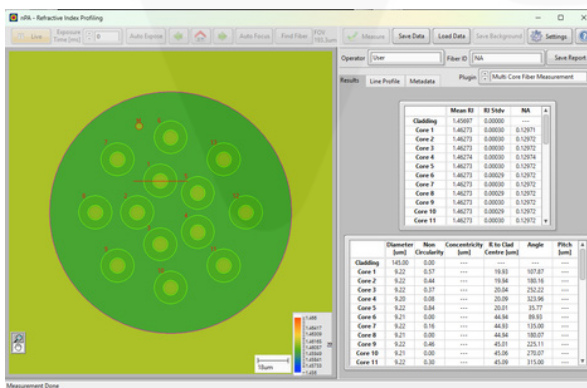

Measured values:

- Cladding – diameter, non-circularity, average RI, RI standard deviation
- Core – diameter, non-circularity, peak RI, Trench/pedestal diameter, Trench/pedestal non-circularity, Trench/pedestal RI, Relative position – either cladding, central core, or average of cores as reference. Expressed as either X-Y or R- θ .
- Marker - Relative position

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.



Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03



▶ [Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode \(BIMM\) Fiber RI & Geometry Measurement](#)

Technical Specifications

Measurement Capabilities

Refractive Index Repeatability*	0.0002
Fiber Diameter	40 to 600 μm
Fiber Material	Silica glass
2D Measurement Time**	< 10 sec
Measurement Range***	+/- 0.025

*Repeatability is measured on a 125 μm MM fiber sample without removing from the measurement cell

** averaging 5 images

*** around reference fluid index

Optical

Measurement Wavelength	630 nm
Maximum Field of View	830 μm

Physical

Weight	6 kg
Size	0.5 m x 0.16 m x 0.13 m
Operating Temperature	15 - 30°C
Performance Specification	Validated at 22°C
Computer Requirements	All systems are supplied with a computer running up-to-date Windows operating system
Data Interface	1 X USB 3.0 (USB A to USB B: 1m cable supplied)

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.



Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03



▶ [Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode \(BIMM\) Fiber RI & Geometry Measurement](#)

Ordering Information

Part Number	Description
-------------	-------------

nPA-600

Optical Fiber Refractive Index Profiler for full 2D measurement of optical fibers with diameters between 40 μm and 600 μm . Including optical unit, nPA-IL-1.4680 refractive index liquid kit, nPA-CS100 set of cover slips, nPA-FTK-600 fiber test kit, nPA-CC rigid carrying case, nPA-F0270 and nPA-F0620 ferrule pins, cables, software package, APL-DC desktop computer, keyboard and mouse.

Plug-ins	Description
----------	-------------

nPA-SPI01

nPA Software Plugin for measurement of RI and geometry of Panda-style PM Fibers

nPA-SPI02

nPA Software Plugin for measurement of RI and geometry of Single Mode Fibers

nPA-SPI03

nPA Software Plugin for measurement of RI and geometry of Bend Insensitive Multimode (BIMM) Fibers

nPA-SPI04

nPA Software Plugin for measurement of RI and geometry of Multicore Fiber

Ferrule Pins	Description
--------------	-------------

nPA-F0125

nPA Fiber guide assembly for optical fiber with outer diameter of up to 125 μm

nPA-F0160

nPA Fiber guide assembly for optical fiber with outer diameter of 125 - 160 μm

nPA-F0230

nPA Fiber guide assembly for optical fiber with outer diameter of 160 - 230 μm

nPA-F0270

nPA Fiber guide assembly for optical fiber with outer diameter of 230 - 270 μm

nPA-F0440

nPA Fiber guide assembly for optical fiber with outer diameter of 270 - 440 μm

nPA-F0520

nPA Fiber guide assembly for optical fiber with outer diameter of 440 - 520 μm

nPA-F0570

nPA Fiber guide assembly for optical fiber with outer diameter of 520 - 570 μm

nPA-F0620


nPA Fiber guide assembly for optical fiber with outer diameter of 570 - 620 μm

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.

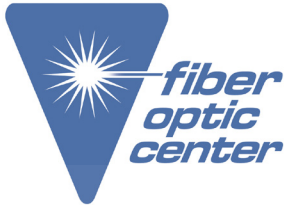

Manufacturer:
Arden Photonics

Product Name:
Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode (BIMM) Fiber RI & Geometry Measurement

Manufacturer Part Number:
NPA-SPI03



▶ [Click here for more details on the Arden Photonics nPA Software Plugin for Bend-Insensitive Multimode \(BIMM\) Fiber RI & Geometry Measurement](#)

Ordering Information

Optional Accessories	Description
nPA-IL-1.4680	Bottle of Immersion liquid, 10 ml, (Refractive Index = 1.4680, measured at 589 nm and 25°C) for refilling nPA measurement cell assembly, including syringes and nozzles
nPA-CP01	nPA Calibration Fiber
nPA-SOC	Replacement oil cell for nPA-600
nPA-CS100	Set of 100 replacement cover slips for use with nPA-600 oil cell
nPA-CC	nPA-600 rigid carrying case
nPA-600EW3	nPA-600 Refractive Index Profiler extended warranty covering parts and labour for 3 years from purchase, return to base.
nPA-600EW5	nPA-600 Refractive Index Profiler extended warranty covering parts and labour for 5 years from purchase, return to base.

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 6/24/2026.