


Manufacturer:
Dymax®

Product Name:
Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive (30ml)

Manufacturer Part Number:
OP-83-LS-30ML

▶ [Click here for more details on the Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive \(30ml\)](#)

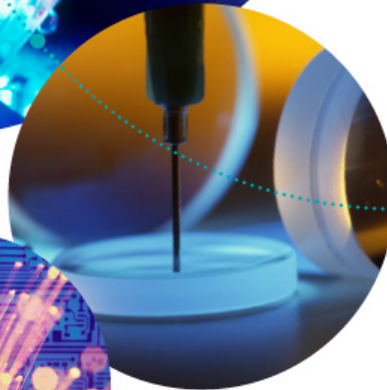

LIGHT-CURABLE ADHESIVES FOR
LENS AND FIBER OPTIC BONDING



Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.



Manufacturer:
Dymax®

Product Name:
Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive (30ml)

Manufacturer Part Number:
OP-83-LS-30ML

▶ [Click here for more details on the Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive \(30ml\)](#)

OP-Series Products

Product	Description	Shrinkage	Refractive Index (Cured)	Viscosity, cP	Durometer Hardness*
OP-24-REV-B	Clear; Multi-Cure® (UV/light/heat/activator); tack and bond with UV, heat, or activator where light won't reach; lens mounting	0.39% Linear	1.50	800	D80
OP-29	Clear; UV light cure; flexible; resists yellowing; low stress; good for doublet bonding, lens mounting, or fiber optic splicing	0.79% Linear	1.50	2,500	D60
OP-29-GEL	Clear; UV light cure; flexible; resists yellowing; low stress; gel viscosity for minimum movement after dispense; good for doublet bonding, lens mounting, or fiber optic splicing	0.79% Linear	1.50	20,000	D65
OP-60	Opaque; low shrinkage; low outgassing; low CTE; good for precise positioning of lenses, prisms, and other optical components	0.80% Linear	N/A	150,000	D80
OP-81-LS	Off white/opaque epoxy; UV/visible light cure or LED curable; low temp heat cure that can be used as the sole cure mechanism or secondary for shadow areas; low shrinkage; low CTE	1.50% Volumetric	N/A	60,000	D90
OP-83-LS	Off white/opaque epoxy; UV/visible light cure or LED curable; low temp heat cure that can be used as the sole cure mechanism or secondary for shadow areas; very low shrinkage; low CTE	1.10% Volumetric	N/A	86,000	D94

*D = Rigid / A = Elastic / OO = Soft



Diode Curing



Lens Bonding

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.



Manufacturer:
Dymax®

Product Name:
Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive (30ml)

Manufacturer Part Number:
OP-83-LS-30ML


▶ Click here for more details on the Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive (30ml)

Product	T _g Glass Transition Temperature °C (By DMA)	Tensile Bar Strength ASTM D638			Adhesion			
		Tensile, psi [MPa]	Modulus of Elasticity, psi [MPa]	Elongation	Ceramic	Glass	Metal	Plastic
OP-24-REV-B	79 u	5,200 [36]	320,000 [2,206]	35%		•	•	•
OP-29	64 u	3,000 [22]	34,000 [234]	110%		•	•	○
OP-29-GEL	56 u	3,500 [24]	30,000 [200]	80%		•	•	○
OP-60	114 u	4,900 [34]	146,250 [1,008]	2.4%	•	•	•	•
OP-81-LS	153 u	45 [6,600]	1,600 [230,600]	2%	○	○	•	•
OP-83-LS	184 u	36.7 [5,328]	3,983 [578,000]	1.2%		•	•	•

u = UV-only cure • Recommended ○ Limited applications



Lens Laminating



Prism Curing

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.



Manufacturer:
Dymax®


Product Name:
Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive (10ml)

Manufacturer Part Number:
OP-83-LS-30ML


▶ [Click here for more details on the Dymax OP-83-LS Hybrid UV & Heat Cure Adhesive \(30ml\)](#)

Applications


- Diode Assembly
- Lens Bonding
- Lens Laminating
- Prism Curing
- VCSEL Potting
- Fiber Optic Bonding
- Lens Positioning
- LiDAR Assembly
- Camera Module Bonding

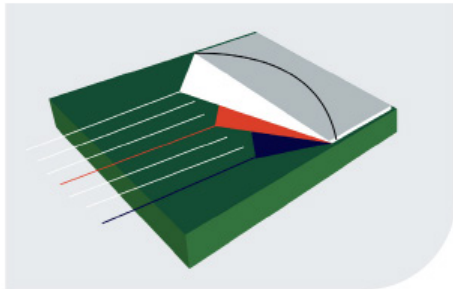


Wavelength Division Multiplexing Bonding Fibers and Diffraction Gratings

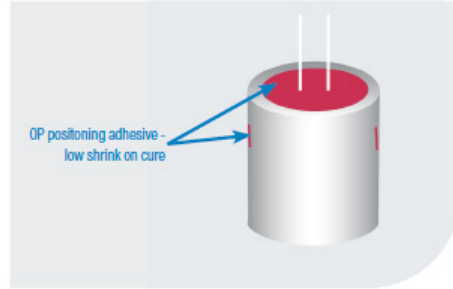

Positioning Laser Diodes (VCSELs)

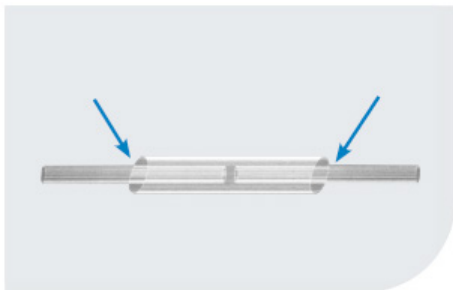

Fiber Optic Through Ferrule or Fiber Pigtailling

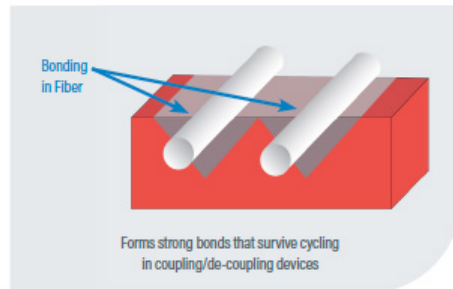

Fiber Optic "V" Groove Bond

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.