


Manufacturer:
Jetting AB

Product Name:
Jetting V2 Fiber Blowing Machine, JetLogger Prepared

Manufacturer Part Number:
V2-JLP-CAN





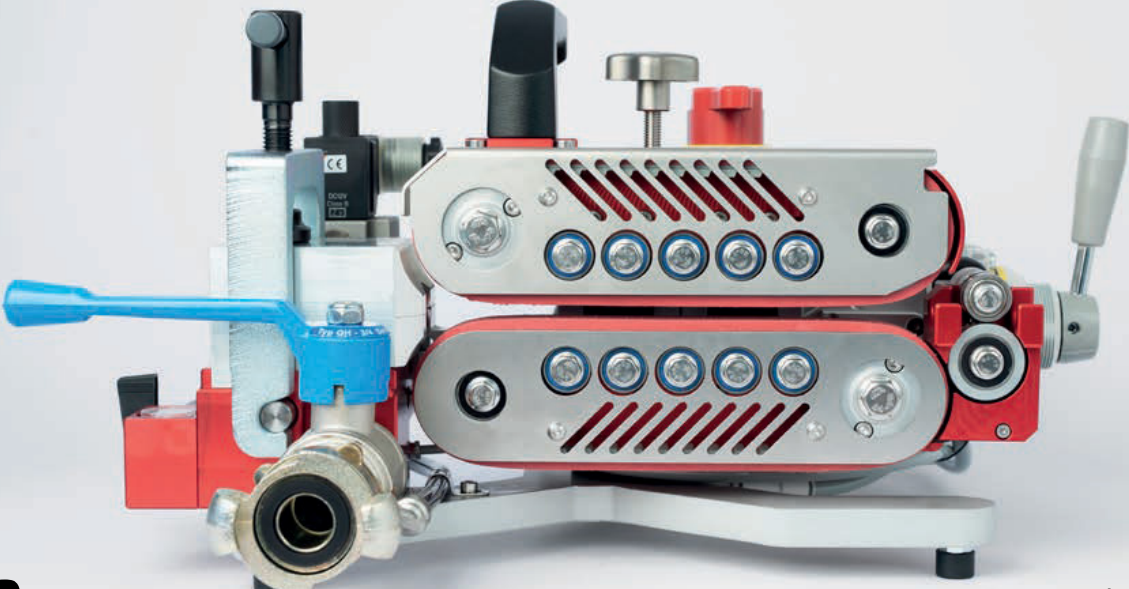






▶ Click here for more details on the Jetting V2 Fiber Blowing Machine, JetLogger Prepared



V2


Robust and compact pneumatic operated fiber blowing machine with the unique Joystick controller securing optimal control of the installation. This machine can be configured for cables ranging from 2.4 to 16 mm and conduits from 7 to 20 mm (microduct) and 0.75 to 2.0 inches (Smooth wall Conduit). Anodized aluminum construction makes this machine both lightweight and easy to maintain.

 Max pressure: 232 psi	 Max Speed: 656 ft/min	 Pushing force: 123.5 lbf	 Cable diameter: 2,4-16 mm	 Microduct diameter: 7-50 mm	 Smooth wall Conduit: 0.75"-2.0"	 Weight: approx 23 lbs	 Air connection: 3/4" Claw connector	 WxHxD 16.5 x 9.1 x 17.7 in.
---	---	--	---	---	---	---	---	---

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

Product specifications and data are subject to change without notice.



Manufacturer:
Jetting AB

Product Name:
Jetting V2 Fiber Blowing Machine, JetLogger Prepared

Manufacturer Part Number:
V2-JLP-CAN



▶ Click here for more details on the Jetting V2 Fiber Blowing Machine, JetLogger Prepared

FIBER BLOWING MACHINE FOR CABLE 2.4-16 MM / DUCT 7-50 MM

- Pneumatic operation, double motors.
- Joystick Controller with forward and reverse function.
- Delivered with reinforced soft grip belts (red).
- Electronic counter for speed and distance.
- Gentle operation with 450 mm belt length.
- Display for speed, distance and gauge for pressure in duct.
- Max. speed: 656 ft/min, max. pushing force on cable: 123.5 lbf.
- Adjustable clamping force.
- Works with electronic documentation system (JetLogger).
- Duct air release valve, evacuating compressed air from the duct quickly.

STD CONFIGURATION

- Transport case
- Extra table fixtur
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- 1 bottle pneumatic oil
- Service kit
- Drive belts (Red)
- Duct air quick release valve

ACCESSORIES FOR V2


- Duct clamps
- Cable guides
- Cable seals
- Afterblower
- Floating kit
- 9-12 V adapter for replacing 9 V battery for digital display
- Electronic documentation system (JetLogger)
- Air hose with claw-connector
- Heavy duty reinforced belts (orange)
- V2 Transport case with foam insert



DUCT AIR VALVE



SECURITY STOP



3/4" CLAW CONNECTOR



DUCT CLAMPS IN DIFFERENTS SIZES



AFTERBLOWER




CABLE GUIDE (AVAILABLE IN 3 DIFFERENT SIZES)



JETTING V2



V2 TRANSPORT CASE WITH FOAM INSERT



HANDLE FOR EASY AND SMART TRANSPORTATION

Contact the professionals at Fiber Optic Center for a quote or to get more details.

23 Centre Street • New Bedford, MA 02740 USA • focenter.com • 508-992-6464 • (800) 473-4237 • sales@focenter.com

Product specifications and data are subject to change without notice.