



Manufacturer:

Seikoh Giken

Product Name:

Seikoh Giken HandiMate™ 1.25mm & 2.5mm Ferrule Cleaner, PC/APC - Synthentic Cleaner

Manufacturer Part Number:

SHM-503

Click here for more details on the Seikoh Giken HandiMate™ 1.25mm & 2.5mm Ferrule Cleaner, PC/APC - Synthentic Cleaner



The new, enhanced HandiMate cleaner incorporates a synthetic cleaning cloth offering greater durability, usability and improved reliability.

The SHM-503 results in a handheld connector cleaner that is strong enough for aggressive cleaning of a wider range of contaminates, soils and end-face debris.


Stable, consistent, cleaning performance regardless of operator skill thanks to its patent pending Slide-Guide™ connector holder.

Key Features

- Extra durable, compact and highly reliable cleaner for connector end-face suitable for cleaning in the field and factory.
- Automatic "Clean and Advance" tape technology provides a fresh cleaning surface for each use eliminating waste and guaranteeing long tool life.
- Packaged in a handy palm sized unit, the unit enables more than 500 times cleaning.
 Works with both Simplex or Duplex applications.
- ESD Anti-static materials. Supports both PC and APC endface designs.
- Aggressively priced when compared to other hand-held field cleaning tools.

Applications

- Customer premises, troubleshooting / maintenance
- Pedestals, COs, Head-Ends, Routine Testing
- Installation / Assembly / Production environments



Contact the professionals at Fiber Optic Center for a quote or to get more details.





Manufacturer:

Seikoh Giken

Product Name:

Seikoh Giken HandiMate™ 1.25mm & 2.5mm Ferrule Cleaner, PC/APC - Synthentic Cleaner

Manufacturer Part Number:


SHM-503

Click here for more details on the Seikoh Giken HandiMate™ 1.25mm & 2.5mm Ferrule Cleaner, PC/APC - Synthentic Cleaner

■ Specification/ Ordering Information

Part number	SHM-503
	- Ideal cleaner for use in data centers – Supports ESD environments
	- Cleaning work at new network construction sites
Applications	- Repair, Check and Maintenance work at Central Office facilities
	- Maintenance work at field transmission sites
	- Cleaning work for patch-cord at production assembly plants
Applicable Connector	Simplex SC, FC, ST, LC and MU (For PC and APC)
	Duplex LC/PC (Standard Pitch 6.25 and Narrow Pitch 5.25mm)
	Duplex MU/PC (Standard Pitch width 4.5mm)
Dimension	H110×W68×D28 mm (Cap opened)
Weight	80g
Operating method	Automatic Slide-Guide [™] feed system
Usable life	Over 500 times

■ Cleaning Performance

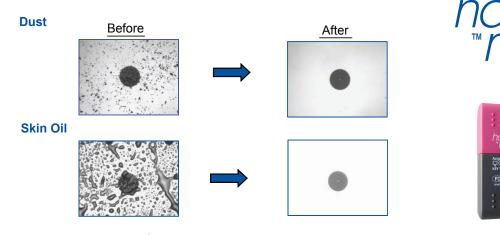

Inspection criteria: IEC 61300-3-35

