



Manufacturer: Seikoh Giken

Product Name: Seikoh Giken SFP-560A 12-Port One-Lever MT Ferrule Holder

Manufacturer Part Number: PH55-MT-12SQ1

Click here for more details on the Seikoh Giken SFP-560A 12-Port One-Lever MT Ferrule Holder



One Lever Action MT Holders New

For SFP-550 series and SFP-560A

PH55-MT-24SQ1-B PH55-MT-12SQ1-B PH55-MT8A-24SQ1-B PH55-MT8A-12SQ1-B (MT/PC, 24-axis) (MT/PC, 12-axis) (MT/APC, 24-axis) (MT/APC, 12-axis)

For SFP-510 series

PH51-MT-20SQ1-B PH51-MT-12SQ1-B PH51-MT8A-20SQ1-B PH51-MT8A-12SQ1-B

(MT/PC, 20-axis) (MT/PC, 20-axis) (MT/PC, 12-axis) (MT/APC, 20-axis) (MT/APC, 12-axis)



To install just simply lock down the lever after inserting MT ferrule

Note: MT ferrule epoxy window width (A) shall be less than 3.4mm

Features

- > No more use of torque wrench for MT ferrule installation
- Only one lever action to install and detach MT ferrule (Pat. JP6192797 CN108367408 Other areas Pat. Pending)
- Approx. 30% reduction in loading and unloading time
- Fully compatible with existing polishing machines
- > Stable and flat geometry performance
- Simple 5 steps flock polishing process
- > Various optional cable managements are available

Contact the professionals at Fiber Optic Center for a quote or to get more details.

<u>focenter.com</u> • 508-992-6464 | (800) 473-4237 • <u>sales@focenter.com</u> 23 Centre Street • New Bedford, MA 02740 USA





Manufacturer: Seikoh Giken

Product Name:

Seikoh Giken SFP-560A 12-Port One-Lever MT Ferrule Holder

Manufacturer Part Number: PH55-MT-12SQ1


Click here for more details on the Seikoh Giken SFP-560A 12-Port One-Lever MT Ferrule Holder

Process and Performance

Simple 5 steps Flock Process (M/M, PPS) (SFP-560A)


Polishing Step	Polishing Condition					
	Polishing Pad	Polishing Film (service life)	Polishing Liquid	Polishing Time (sec)	Pressure(N) (*1)	1st Step Mode
1	PG5X-490-SR3	GC5D (1)	PURIFIED WATER	30(*2)	31 / 12-axis 62 / 24-axis	Pressure Ramp UP
2				10	31 / 12-axis 62 / 24-axis	N/A
ß	PG5X-490-SR3	AR5D (1)	PURIFIED WATER	60	42 / 12-axis 84 / 24-axis	N/A
4	PG5X-490-SR3	GH5D (1)	PURIFIED WATER	60	42 / 12-axis 84 / 24-axis	N/A
5	PG5X-490-SR3	FM5D-SOAP (1)	PURIFIED WATER	150	42 / 12-axis 84 / 24-axis	N/A

Stable Fiber Height

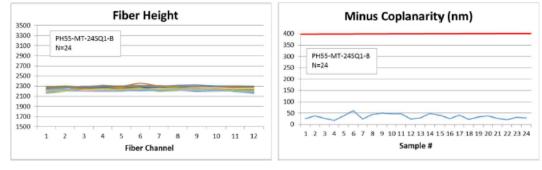



Stable Angle

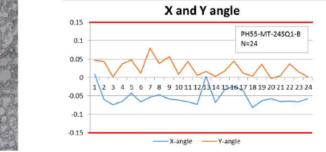

Disclaimer- 1) Polishing method with use of fibrous material is patented in the U.S (US patent No. 6108368). 2) A ferrule assembly with fiber protrusion between 0.5um and 2.5um after polishing is patented in the U.S. (US patent No. 5743785).

Contact the professionals at Fiber Optic Center for a quote or to get more details.

<u>focenter.com</u> • 508-992-6464 | (800) 473-4237 • <u>sales@focenter.com</u> 23 Centre Street • New Bedford, MA 02740 USA