

Manufacturer:
Jetting AB

Product Name:
Jetting V2 Fiber Blowing Machine

Manufacturer Part Number:
V2-CAN

▶ [Click here for more details on the Jetting V2 Fiber Blowing Machine](#)



Robust and compact pneumatic operated fiber blowing machine with the unique Joystick controller securing optimal control of the installation. This machine can be configured from 2,4 to 16 mm cable and 7 to 50 mm duct. Anodized aluminum construction makes this machine both lightweight and easy to maintain.



**FIBER BLOWING MACHINE FOR CABLE
2.4-16 MM / DUCT 7-50 MM**

- Pneumatic operation, double motors.
- Electronic counter for speed and distance.
- Gentle operation with 450 mm belt length.
- Display for speed, distance and pressure in duct.
- Max. speed: 200 m/min, max. pushing force on cable: 550 N.
- Adjustable clamping force.
- Works with JetLogger.
- Joystick Controller with forward and reverse function.
- Duct Air Release Valve, making the reduction of air from the duct very fast.


TECHNICAL DATA

- **Max pressure:**
16 Bar
- **Pushing force:**
up to 550 N
- **Cable diameter:**
2,4 - 16 mm
- **Duct diameter:**
7 - 50 mm
- **Weight:**
approx 11 kg
- **Air connection:**
3/4" Claw connector
- **WxHxD:**
420 x 230 x 450 mm

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com
23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.

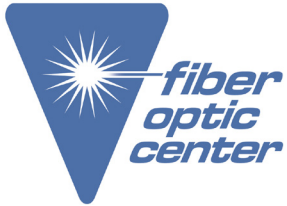




Manufacturer:
Jetting AB

Product Name:
Jetting V2 Fiber Blowing Machine

Manufacturer Part Number:
V2-CAN



▶ [Click here for more details on the Jetting V2 Fiber Blowing Machine](#)

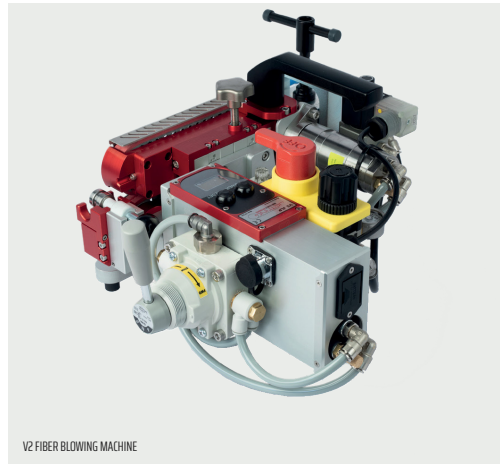

STD CONFIGURATION V2

- Transport case
- Extra fixtur
- 1 Bottle Micro Duct Lube
- 1 Bottle Duct Lube
- 1 Bottle Pneumatic oil
- Service kit

ACCESSORIES FOR V2

- Duct clamps
- Cable guides
- Afterblower
- Floating kit
- 9-12 V adaptor. For replacing 9 V battery for digital display
- Jetlogger
- V2 Transport Case with foam insert and handle

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.