

[Learn More](#)**Manufacturer:**

Jonard Tools®


**Product Name:**

Jonard Tools® BTR-6 Fiber Buffer Tube Ringer (1.2mm-6 mm)

**Manufacturer Part Number:**

BTR-6

► [Click here for more details on the Jonard Tools® BTR-6 Fiber Buffer Tube Ringer \(1.2mm-6 mm\)](#)

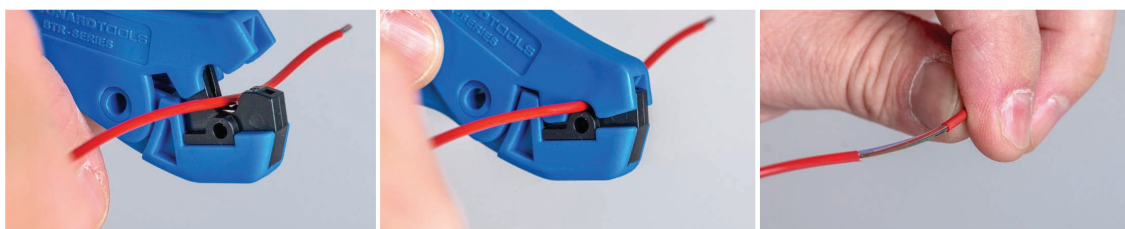

The Jonard Tools **BTR-6** Buffer Tube Ring tool provides quick access to fibers inside buffer tubes from 1.2 mm to 6 mm in diameter and will work with buffer tubes with wall thicknesses from 0.2 mm to 0.5 mm. The tool is light and durable with a hardened steel blade for long life and includes a hole for tethering.

**Easy to use:**

- Squeeze handles together to open jaws
- Locate where you want to ring the buffer tube and place buffer tube between jaws
- Release handles to close jaws and rotate tool around the buffer tube 2-4 times to ring cut
  - Note: Depending on the buffer tube material and wall thickness more or less turns may be needed
- Squeeze handles together to open jaws and remove buffer tube
- Pull the buffer tube apart at ring location. You may need to bend the tube to break the tube at the ring cut location

| SPECIFICATIONS              |                      |
|-----------------------------|----------------------|
| TYPE                        | Buffer Tube Ring     |
| COLOR                       | Blue                 |
| MATERIAL                    | Plastic              |
| BUFFER TUBE DIAMETER RANGE  | 1.2 mm to 6 mm       |
| BUFFER TUBE THICKNESS RANGE | 0.2 mm to 0.5 mm     |
| WEIGHT                      | 0.031 lbs (14 grams) |
| LENGTH                      | 3.75" (95.25mm)      |
| UPC #                       | 811490017658         |

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

*Product specifications and data are subject to change without notice.*