


## Non-Armored Loose Tube Cable— Double Jacket (LE Series DJ)

Acting as the backbone for most of today's fiber based systems, stranded fiber optic cables play a critical role in the high speed network. AFL's Non-Armored Double Jacket Loose Tube fiber optic cables are designed to provide high fiber counts with the flexibility and versatility required for today's most demanding installations while incorporating a second jacket when extra mechanical protection is desired. With fiber counts up to 576 and S-Z strand designs for easy mid-span access, AFL's cables comply with EIA/TIA, REA/RUS PE-90 and GR-20. Industry standard designs combined with innovative technologies, such as a dry core product, yield a world class cable that will support today's and tomorrow's technological needs.

### Product Applications

- Long Haul Networking
- Building Interconnections (Campus LAN)
- Trunking Lines Direct to Telecommunications Closet
- Local Loop
- Distance Learning
- Distribution
- Intra-building Backbones

### Cable Components

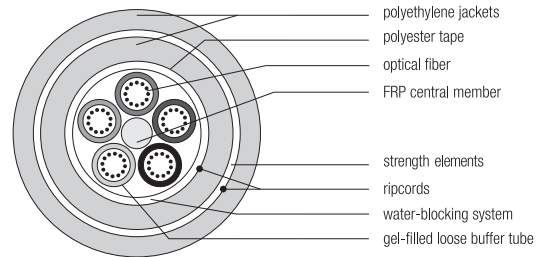

### Temperature Specifications

TEMPERATURE RANGE	
INSTALLATION	-30°C to +70°C
OPERATING	-40°C to +70°C
STORAGE	-40°C to +75°C

### Typical Lengths

FIBER COUNT	MAXIMUM LENGTHS*			
	SINGLE-MODE		MULTIMODE	
	FEET	METERS	FEET	METERS
6 - 60	22,900	7,000	22,900	7,000
72 - 96	22,900	7,000	22,900	7,000
108 - 120	22,900	7,000	22,900	7,000
132 - 144	22,900	7,000	22,900	7,000
146 - 216	17,000	5,200	17,000	5,200
218 - 288	15,000	4,600	15,000	4,600
290 - 432	10,800	3,300	10,800	3,300
434 - 576	6,500	2,000	6,500	2,000

\* Longer lengths may be available upon request.

### Fiber Specifications

FIBER TYPE	MAXIMUM ATTENUATION (DB/KM)				OVERFILL LAUNCH MIN. BANDWIDTH (MHZ•KM)		GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)	
	850 NM	1300 NM	1310 NM	1550 NM	850 NM	1300 NM	850 NM	1300 NM
(6) 62.5/125 GIGA-Link™ 300	3.5	1.2	N/A	N/A	200	600	300	550
(5) 50/125 GIGA-Link™ 600	2.9	0.9	N/A	N/A	500	500	600	600
(L) 50/125 Laser-Link™ 300	2.9	0.9	N/A	N/A	1500	500	900	550
(9) Single-mode	N/A	N/A	0.35	0.25	N/A	N/A	N/A	5000
(Q) Non-zero Dispersion-shifted Single-mode	N/A	N/A	N/A	0.25	N/A	N/A	N/A	N/A
(K) AFL G.657.A1 Single-mode	N/A	N/A	0.35	0.25	N/A	N/A	N/A	5000

Gigabit Ethernet Minimum Link Distances are based on "bandwidth"/modal dispersion constraints. Actual link distances may be constrained by attenuation, depending on specific loss budget.

## Non-Armored Loose Tube Cable— Double Jacket (LE Series DJ)

### Ordering Information

AFL NO.	FIBER COUNT	NUMBER OF TUBES/FIBERS	NOMINAL DIAMETER		NOMINAL WEIGHT		MAXIMUM TENSILE LOAD		MINIMUM BEND RADIUS	
			INCHES	MM	LBS/1,000FT	KG/KM	LBS (N)		INCHES (CM)	
							SHORT TERM	LONG TERM	SHORT TERM	LONG TERM
LE006★C5111N1	6	1w/6 (4 fillers)	0.49	12.5	79	118	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE012★C5111N1	12	1w/12 (4 fillers)	0.49	12.5	80	119	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE018★C5111N1	18	1w/12,1w/6 (3 fillers)	0.49	12.5	81	120	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE024★C5111N1	24	2w/12 (3 fillers)	0.49	12.5	81	120	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE030★C5111N1	30	2w/12,1w/6 (2 fillers)	0.49	12.5	82	121	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE036★C5111N1	36	3w/12 (2 fillers)	0.49	12.5	82	121	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE048★C5111N1	48	4w/12 (1 filler)	0.49	12.5	83	123	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE060★C5111N1	60	5w/12 (no fillers)	0.49	12.5	84	125	600 (2670)	200 (890)	9.8 (25)	4.9 (13)
LE072★C6111N1	72	6w/12 (no fillers)	0.53	13.4	97	144	600 (2670)	200 (890)	10.6 (27)	5.3 (14)
LE084★C8111N1	84	7w/12 (1 filler)	0.60	15.2	120	178	600 (2670)	200 (890)	12.0 (31)	6.0 (16)
LE096★C8111N1	96	8w/12 (no fillers)	0.60	15.2	121	180	600 (2670)	200 (890)	12.0 (31)	6.0 (16)
LE108★CA111N1	108	9w/12 (1 filler)	0.67	17.1	150	222	600 (2670)	200 (890)	13.4 (34)	6.7 (17)
LE120★CA111N1	120	10w/12 (no fillers)	0.67	17.1	151	224	600 (2670)	200 (890)	13.4 (34)	6.7 (17)
LE132★CC111N1	132	11w/12 (1 filler)	0.75	19.0	184	273	600 (2670)	200 (890)	15.0 (38)	7.5 (19)
LE144★CC111N1	144	12w/12 (no fillers)	0.75	19.0	185	275	600 (2670)	200 (890)	15.0 (38)	7.5 (19)
LE216★CI311N1	216	18w/12 (no fillers)	0.76	19.3	188	280	600 (2670)	200 (890)	15.2 (39)	7.6 (20)
LE288★CO311N1	288	24w/12 (no fillers)	0.87	22.0	245	365	600 (2670)	200 (890)	17.4 (44)	8.7 (22)
LE432★IO311N1	432	24w/18 (no fillers)	0.94	23.9	289	430	600 (2670)	200 (890)	18.8 (48)	9.4 (24)
LE576★OO311N1	576	24w/24 (no fillers)	1.08	27.3	372	554	600 (2670)	200 (890)	21.4 (55)	10.7 (28)

Note: Diameter and weight subject to change without notice

★ Fiber Types – Replace asterisk (★) in AFL number with number in the Fiber Specifications table on previous page.

### Reel Information

ITEM	REEL A		REEL B		REEL C		REEL D		REEL E	
	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM
Reel Height	42	106.7	58	147.3	66	167.6	72	182.8	84	213.4
Reel Width Outside	36	91.4	38	96.5	42	106.7	42	106.7	40	101.6
Reel Width Inside	32	81.6	32	81.3	36	91.4	36	91.4	34	86.4
Drum Diameter	23	58.7	28	71.1	36	91.4	36	91.4	35	88.9
Arbor Hole Diameter	3	7.9	3	7.9	3	7.9	3	7.9	3	7.9
Reel Weight With Lagging	180 lbs	82 kg	420 lbs	191 kg	685 lbs	311 kg	710 lbs	320 kg	950 lbs	431 kg

AFL typically provides Loose Tube cable on several standard sizes of non-returnable wooden reels. Non-standard reel sizes are available upon request. Larger reel sizes may be required to accommodate long cable lengths.